



Installationsanleitung Einbaurahmen für Einzelbatterie LED Rettungszeichenleuchte


24m Erkennungsweite

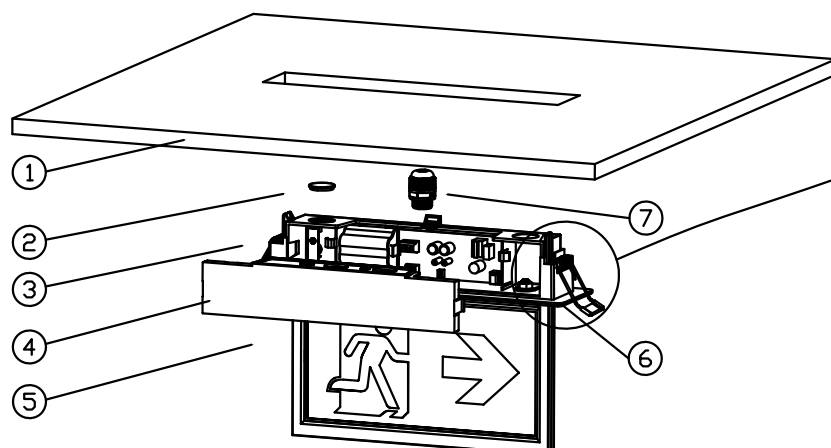


1. Deckenplatte
2. Kabeleinführung
3. Leuchte
4. Montageplatte der Leuchte
5. Prüftaster mit Prüf-LED
6. Einbaurahmen
7. Kabeldurchführung (PG11 oder M20)
(nicht im Lieferumfang enthalten)
8. Klammer

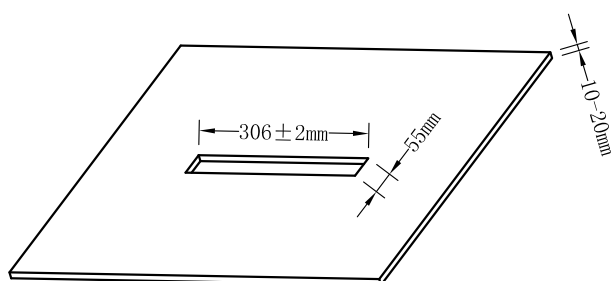


1. Stellen Sie einen Lochausschnitt mit den Maßen 306x55mm her. Die Deckenplatte muss zwischen 10 - 20mm stark sein.

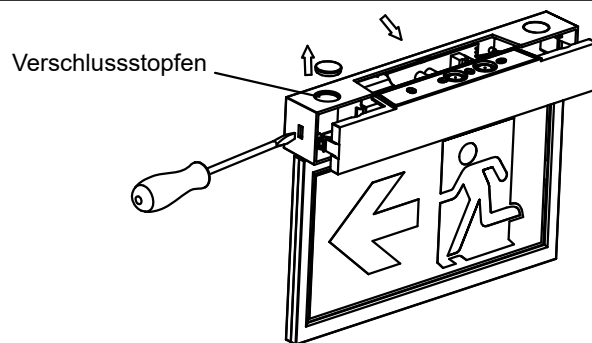

2. Entfernen Sie die Montageplatte der Leuchte und anschließend den Verschlussstopfen auf der Seite des Prüftasters (siehe Schritt 4).

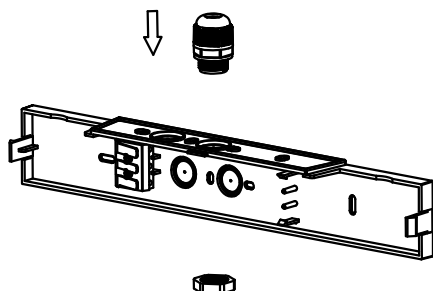


3. Stellen Sie einen Durchbruch an der mittleren Kabeleinführung her und montieren Sie die Kabelverschraubung an der Leuchte. Führen Sie das Anschlusskabel durch und schließen Sie es an (siehe Leuchtenanleitung).




4. Schieben Sie die Leuchte in den Einbaurahmen. Beachten Sie hierbei die Orientierung der Leuchte.


5. Rasten Sie den Prüftaster in die dafür vorgesehene Öffnung ein.

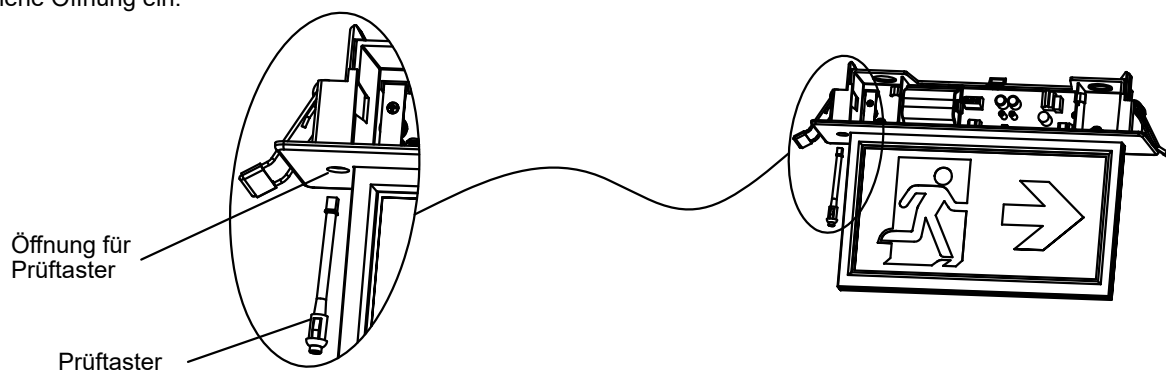

6. Schließen Sie den Prüftaster an die kleine Elektronikeinheit an.


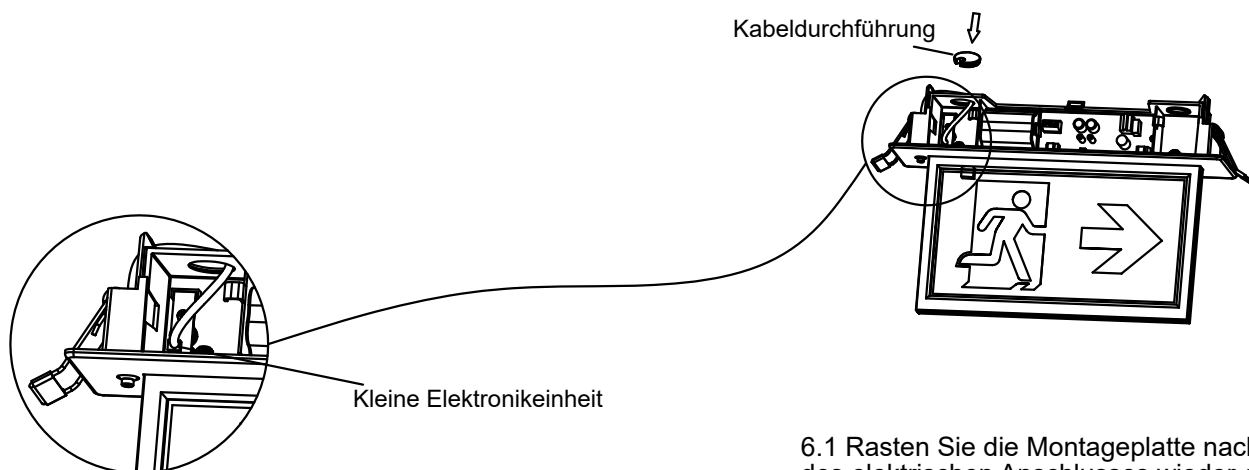


6.1 Rasten Sie die Montageplatte nach Abschluss des elektrischen Anschlusses wieder ein.

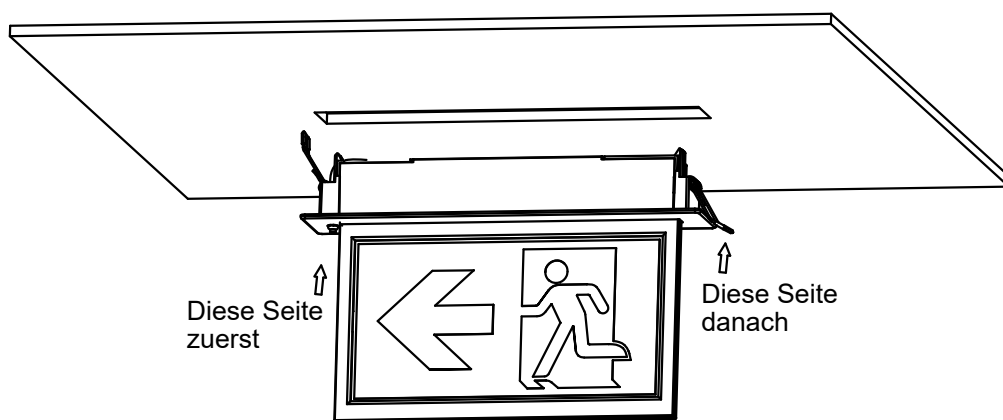

7. Klappen Sie die Montageklammern nach oben, drücken Sie die Leuchte mit dem Einbaurahmen gegen die Deckenplatte und schieben Sie beide Seiten nacheinander nach oben.

8. Abschluss der Installation

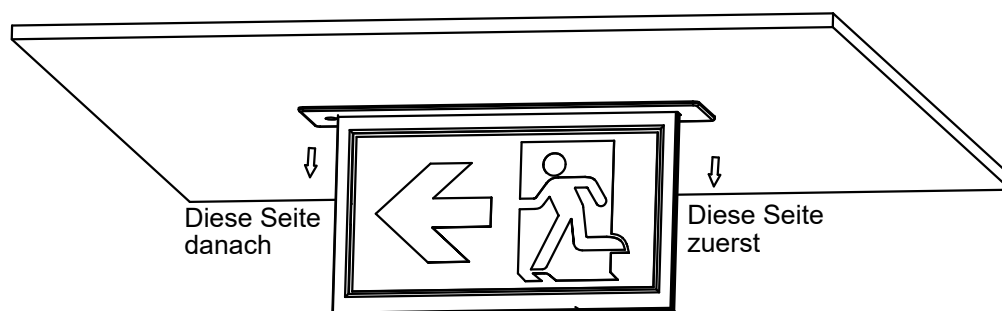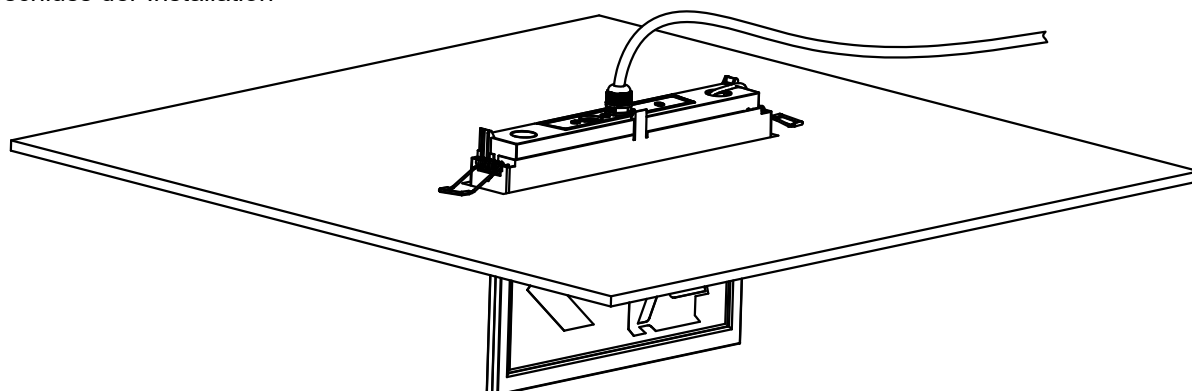


9. Anleitung zur Demontage


Ziehen Sie die Leuchte in umgekehrter Reihenfolge wieder heraus.

Recessed Kit installation instruction


Viewing Distance: 24m

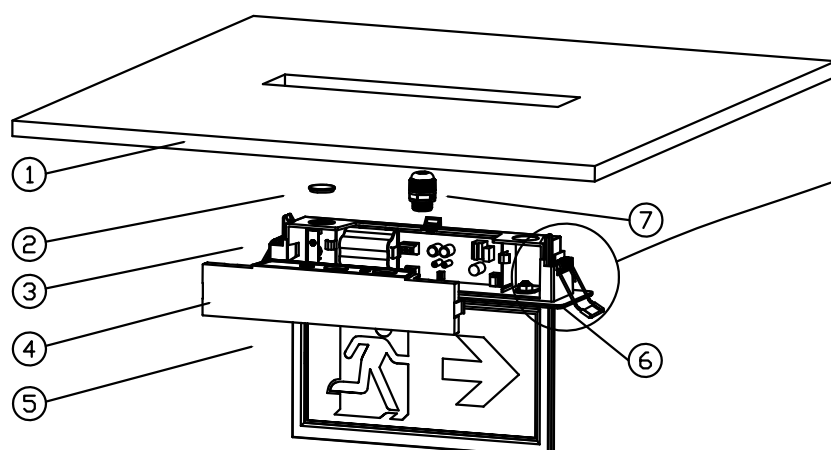


- ① Mounting plate
- ② Cable bushing
- ③ Fixture
- ④ Back plate of fixture
- ⑤ Test switch with indicator
- ⑥ Recessed kit
- ⑦ Cable gland (PG11 or M20)
(not provided)
- ⑧ Spring

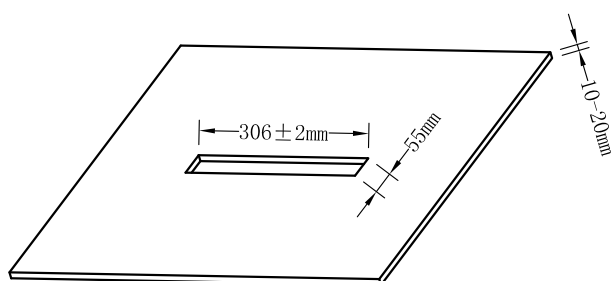


1, Make a cut out hole, dimension 306mm*55mm.
The thickness of mounting plate 10 to 20 mm.

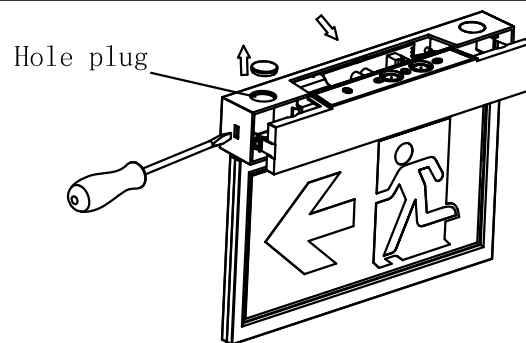

2, Remove back plate from fixture, then remove
hole plug at test switch side.

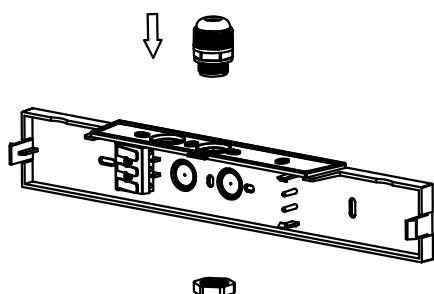


3, Knock-out cable entry hole, assemble cable gland
on fixture, through cable to cable gland then make
correct AC connect (ref. main fixture instruction).

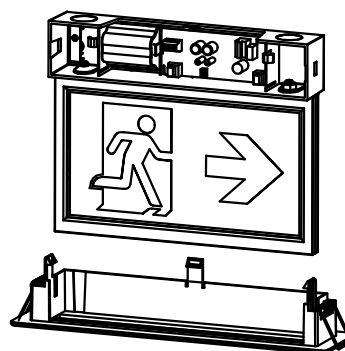


4, Assemble fixture on recessed kit, notice the
direction of fixture.


5, Snap test switch on recessed kit.

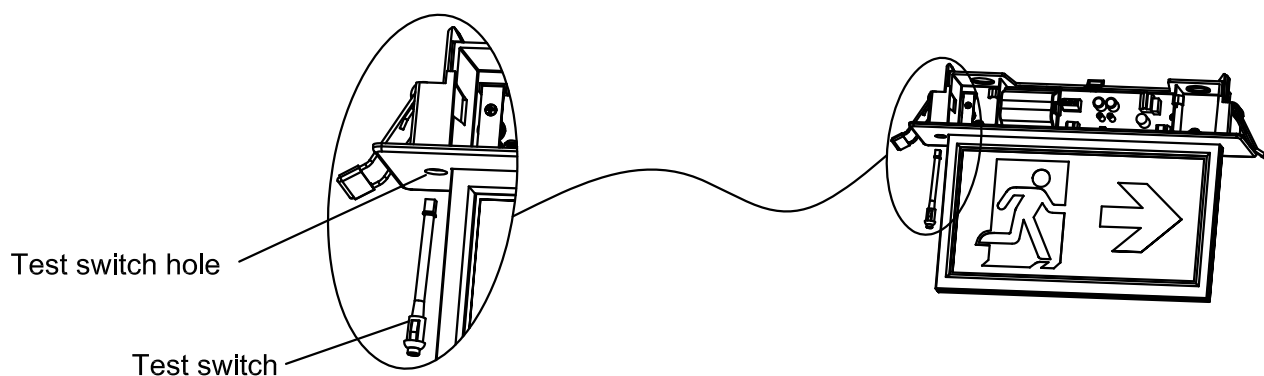

6, Snap Test switch connector on small PCBA.
assemble cable bushing.

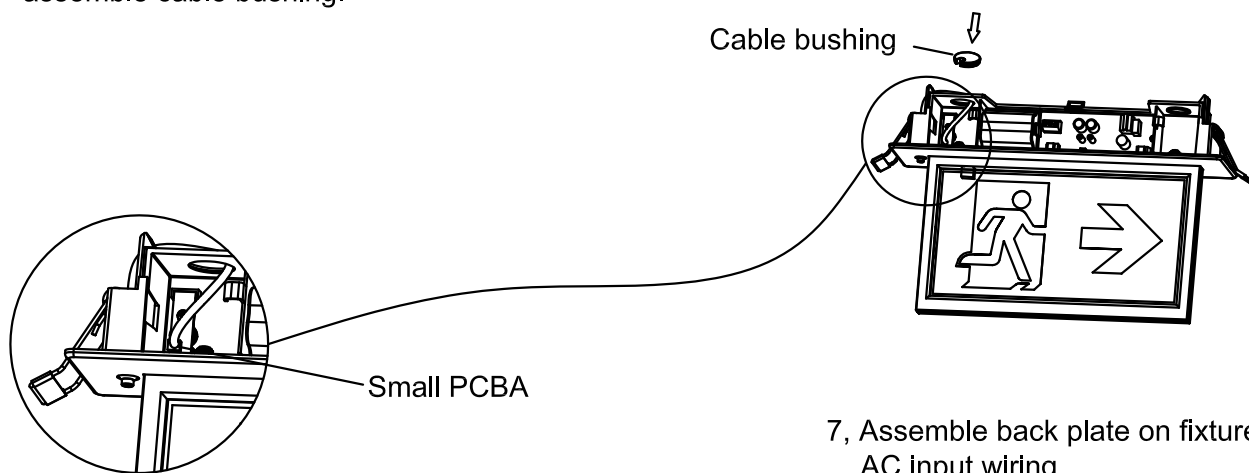


7, Assemble back plate on fixture after finish
AC input wiring.

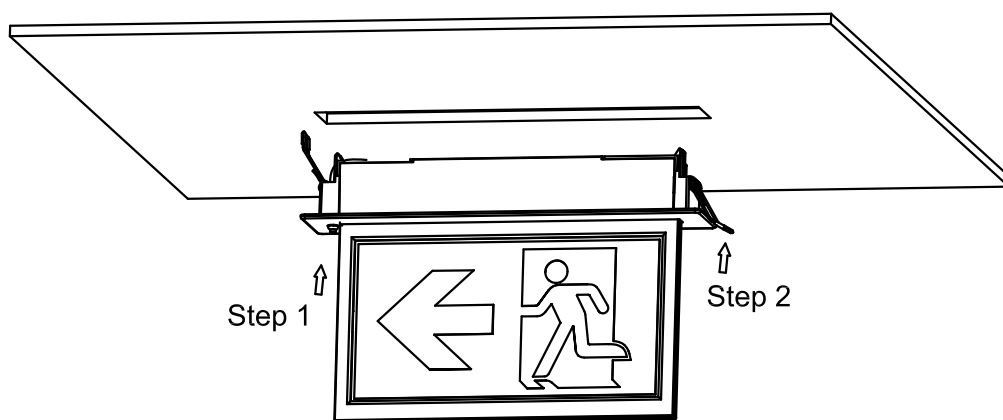

8, Rotate spring to up, press the fixture with recessed kit on mounting plate, press in one side then another.

9, Finish installation.

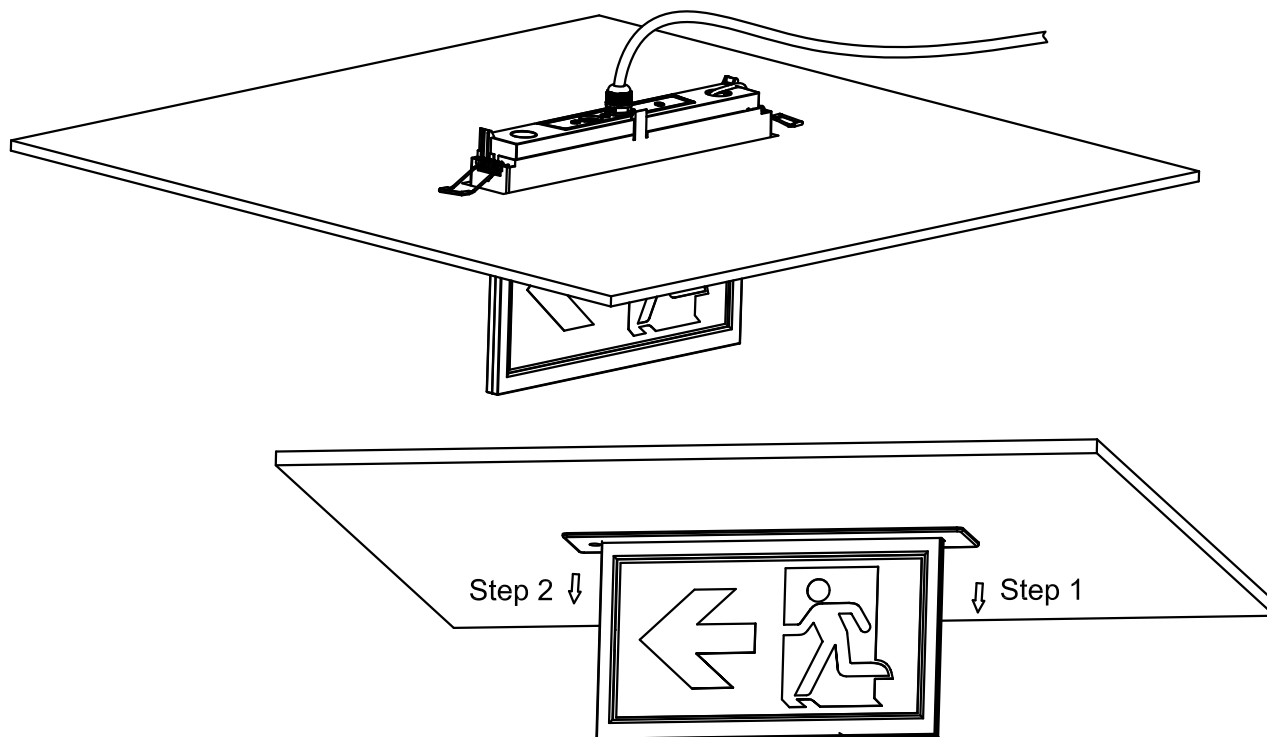

10, Instruction for dismount the fixture.

Pull out fixture from on side then
another side.