


Important: Read All Instructions Prior to Installation

Function introduction

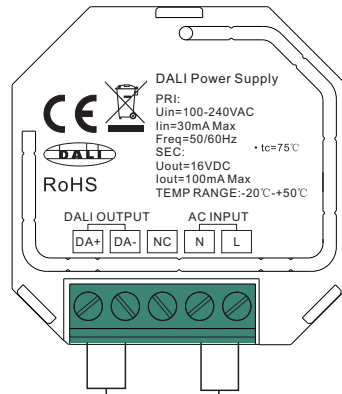

DALI bus power output ————— 100-240VAC power input

Product Data

Input Voltage	Output Voltage	Output Current	Frequency	Size(LxWxH)	Ambient Temperature
100-240VAC	16VDC	100mA max	50/60Hz	45.5x45x20.3mm	-20°C ~ +50°C

- Mini DALI power supply, max. 100mA output
- Match all DALI system in the market
- Mini size, easy installation into existing wall boxes
- Waterproof grade:IP20

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

Conformity & Standards

- Radio Frequency Interference according to EN 55015:2013
- Immunity standard according to EN 61547:2009
- Mains current harmonics according to EN 61000-3-2:2014
- Limits for Voltage Fluctuations and Flicker according to EN 61000-3-3:2013
- General and safety requirements EN 61347-1:2015
- CE marked

