


ML-A 070.1030.08 APB/DALI


Monoline 070 Surface-Mounted & Pendant (1xLED 14W 830/3000K 1240lm)

— C0/C180 cd / 1000 lm - - - C90/C270

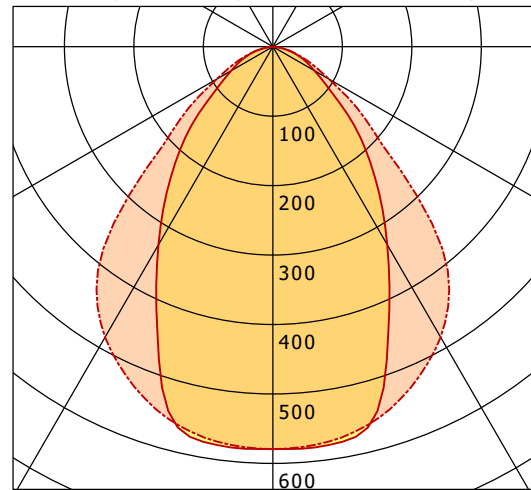

	C0	C90	C180	C270
0°	579	579	579	579
15°	557	559	557	559
30°	329	483	329	483
45°	172	277	172	277
60°	69	93	69	93
75°	27	29	27	29
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

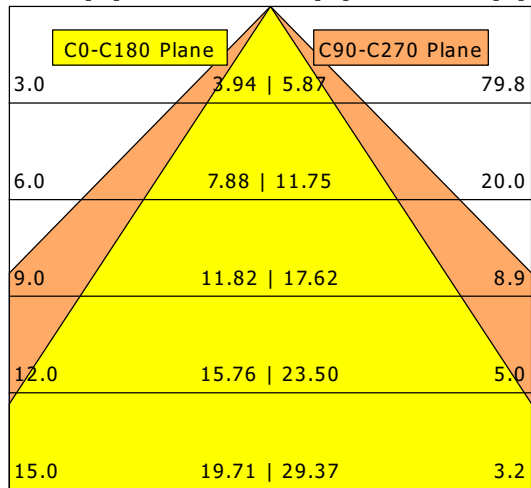

η	LED
Efficiency	89 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	14 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.5
UGR C90/C270	19.8
CIE Flux Codes	66 90 98 100 100
Ra/CRI	> 80