


Connector Location A





Connector Location B

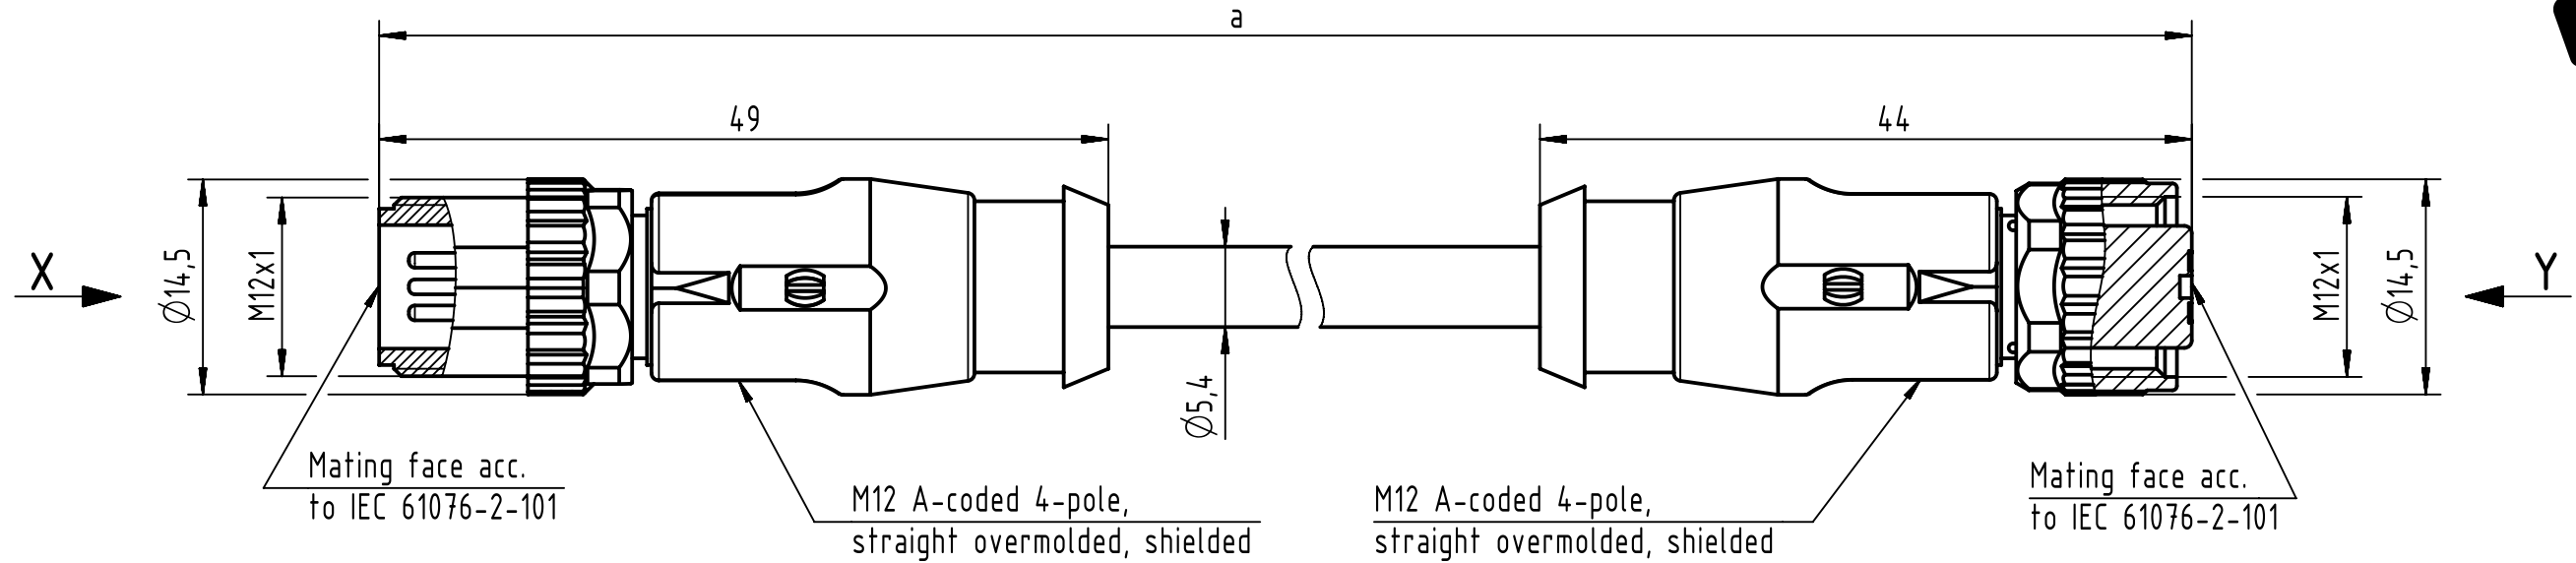

X
male

Loading-Plan

Y
female

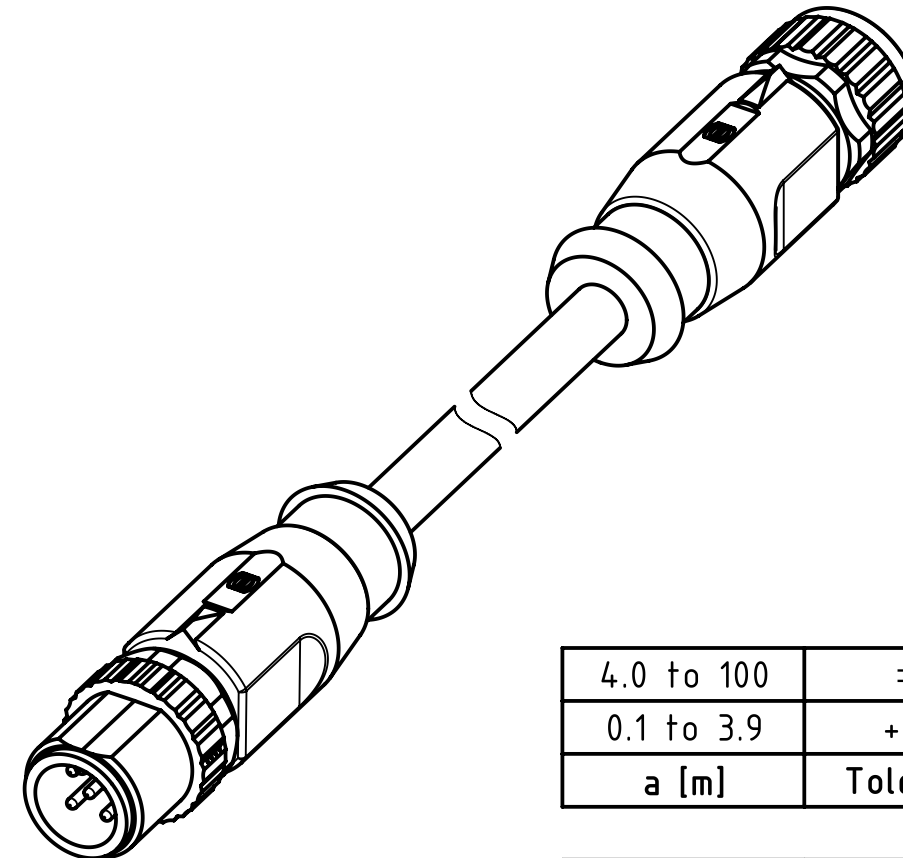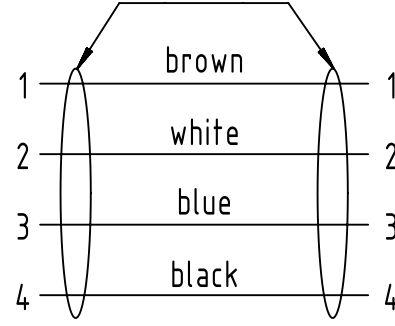

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

4.0 to 100	±1%
0.1 to 3.9	+0.04
a [m]	Tolerance

PUR black, 4x0.34mm ²	21347875474XXX
Type of cable	Part no.

- Protection level: IP67
- Temperature range: -25°C...+80°C

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
All rights reserved		Created by		Inspected by		Standardisation	
Department HCS - RO		STOCHECIC		COSTEA		MUNTEANV	
HARTING Customised Solutions		Title		Date		State	
D-32339 Espelkamp		M12 A 4pol m/f st/st PUR shld		2018-12-14		Final Release	
Type TB		Number 21347875474XXX		Doc-Key / ECM-Nr.		100744318/UGD/013/B	
				Rev. B		Page 1/1	