


ML-A 070.0730.11 APB


Monoline 070 Surface-Mounted & Pendant (1xLED 13W 830/3000K 1120lm)

— C0/C180 cd / 1000 lm - - - C90/C270

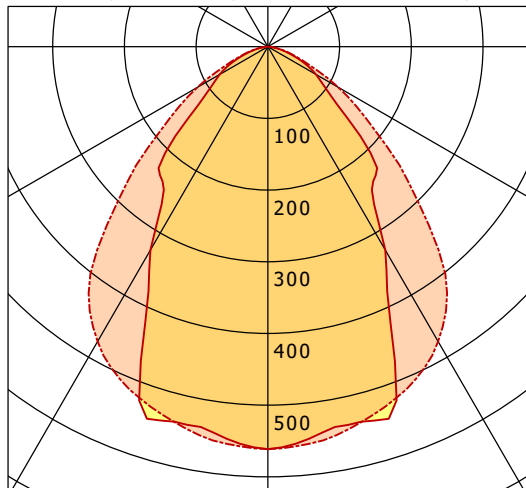

	C0	C90	C180	C270
0°	561	561	561	561
15°	540	537	540	537
30°	327	475	327	475
45°	193	287	193	287
60°	78	114	78	114
75°	24	27	24	27
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

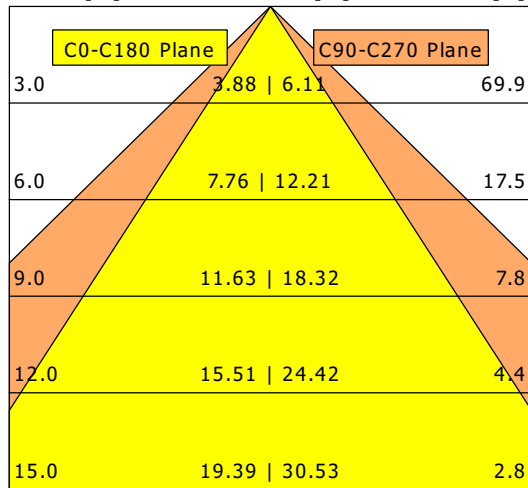

η	LED
Efficiency	86 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	13 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.2
UGR C90/C270	18.3
CIE Flux Codes	66 91 99 100 100
Ra/CRI	>80