
BRUMBERG

ELEU LED wall recessed light

Article no. P3730B

Light. For Generations.



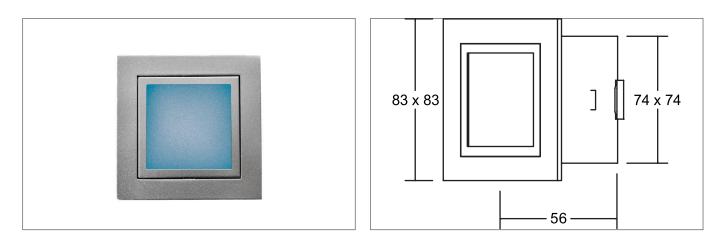

Tender

LED wall recessed light, Square. Ceiling cut-out L x W 74 x 74 mm, Installation depth 56 mm, Weight 0,222 kg, with rotattionssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a glass opal cover.Luminous flux 20 lm, Power 1 x 1,2 W, System Efficiency 17 lm/W, Light colour StructureNodeImpl 4028e4bd62d2f56b0163736142bb10e6, Correlated color temprature (CCT) K, Colour rendering index CRI > 80, Housing material: Steel, Colour: Alu, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): III, Degree of protection (DIN EN 60529): IP20, .For connection to an external driver, which is not included in the scope of delivery of the luminaire. Depending on driver dimmable.

Article data	
Article no.	P3730B
GTIN	4250047729921
Series name	ELEU
Short description	LED wall recessed light
Material	Steel
Colour	Alu
Type of surface	Matt
Shape	Square
Built-in width	74 mm
Built-in length	74 mm
Installation depth	56 mm
Width	83 mm
Hight	3 mm
Weight	0.222 kg

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 02.06.2023 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

BRUMBERG

ELEU LED wall recessed light

Article no. P3730B

Light. For Generations.

Lighting technology	
Colour temperature	blau
Luminous flux	20 lm
System efficiency	17 lm/W
Colour rendering	CRI > 80
Reflector	Without
Light sharing	Symmetric

Operating technology of the luminaire	
System output	1.2 W
Voltage type	DC
Current	350 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	
Degree of protection	IP20
Dimmable	Depending on type of control gear
Control	Depending on driver
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service
	technician commissioned by him or a similarly qualified person.

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable
Further references	No cover with thermal insulation material
Material cover	Glass opal

Packing data	
Gross weight	0.272 kg
Length of packaging	115 mm
Packaging width	85 mm
Packaging hight	85 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
	By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

ELEU LED wall recessed light

Article no. P3730B

BRUMBERG

Light. For Generations.

Accessories	
	Article no.: 17666000 LED converter 350 mA, on/off switchable Power: 1 - 5 W Dimensions: 52 mm x 30 mm x 23 mm
	Article no.: 17662020 LED converter 350 mA, on/off switchable Power: 1 - 7,2 W Dimensions: 68 mm x 35 mm x 21 mm
	Article no.: 17613000 LED converter 350 mA, on/off switchable Power: 1 - 15 W Dimensions: 115 mm x 34 mm x 19 mm
· international · · · · · · · · · · · · · · · · · · ·	Article no.: 17621020 LED converter 350 mA, on/off switchable Power: 1 - 21 W Dimensions: 128 mm x 50 mm x 13 mm
and the second s	Article no.: 17648020 LED converter 350 mA, trailing-edge phase dimmable Power: 0,7 - 17 W Dimensions: 166 mm x 46 mm x 34 mm

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 02.06.2023 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/