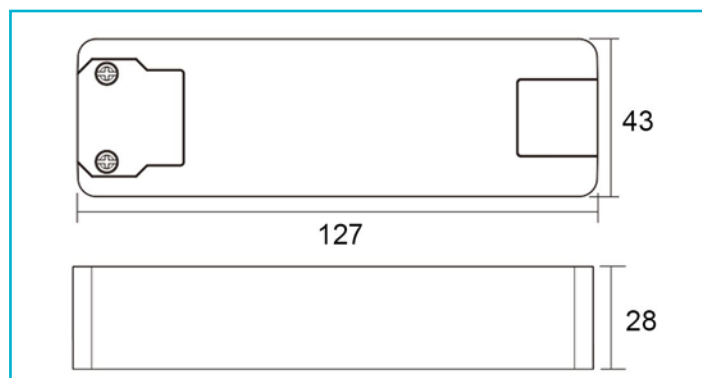


**Special features**

- Compact design
- Flicker-free
- Short-circuit-proof, overload protection, overheating protection

Housing Material

Plastic

Housing Color

Black

Functions

Short-circuit proof, Lamp control gear 110, Furniture installation, Protective extra-low voltage, Overloading protection, Overtemperature protection

Operating Mode

Constant current

Protection Class

Protection class II/protective insulation

Power

20.0-40 W

Output Voltage

40-80 V/DC

Output Current

500 mA

Power Factor

0.97

Connection Type

Clamp

Number of Circuit Breaker B10A max. 8

Number of Circuit Breaker B16A max. 14

Number of Circuit Breaker C10A max. 18

Number of Circuit Breaker C16A max. 29

Inrush Current max. 20 A / 300 μs

Capacitive Load 356.3 nF

Reference Point Tc 80 °C

Working Temperature -20 to 50 °C

Storage Temperature -20 to 50 °C

IP Protection Class IP 20

Life Time

30000 h

Length

127 mm

Width

43 mm

Height

28 mm

Product weight

125 g

