


ML-E 070.1140.08 AOV/DALI


Monoline 070 Recessed (1xLED 33W 840/4000K 3620lm)

— C0/C180 cd / 1000 lm - - - C90/C270

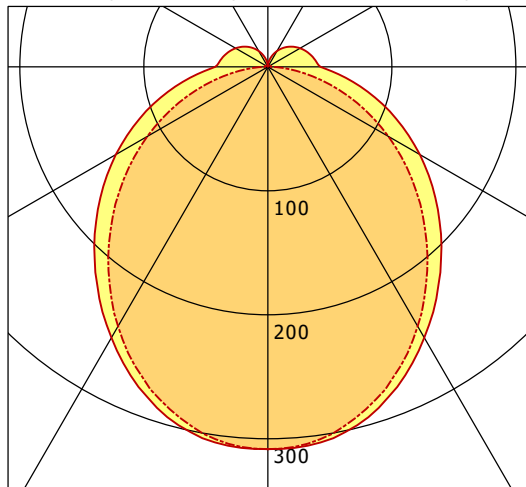

| | C0 | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0° | 308 | 308 | 308 | 308 |
| 30° | 252 | 242 | 252 | 242 |
| 60° | 142 | 112 | 142 | 112 |
| 90° | 42 | 3 | 42 | 3 |
| 120° | 30 | 2 | 30 | 2 |
| 150° | 15 | 1 | 15 | 1 |
| 180° | 0 | 0 | 0 | 0 |
| cd / 1000 lm | | | | |

Offset [m] Cone width [m] Illuminance [lx]

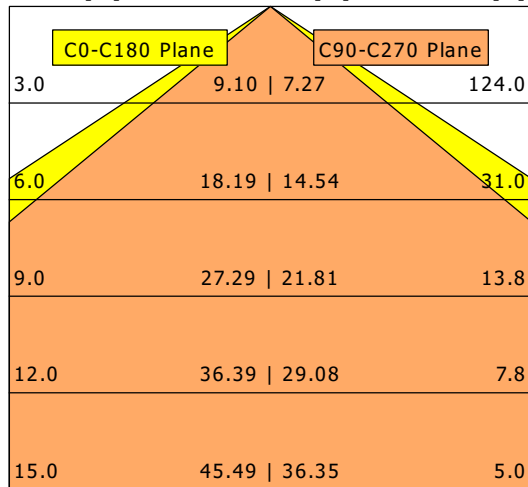

| | |
|--------------------|-----------------|
| η | LED |
| Efficiency | 110 lm/W |
| Direct/Indirect | ↓ 89% / ↑ 11% |
| System Power | 33 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 25.0 |
| UGR C90/C270 | 23.6 |
| CIE Flux Codes | 45 74 92 89 100 |
| Ra/CRI | >80 |