


SKIS-P 302.840.1/DALI

Skive Small | Pendel (1xLED 25W 840/4000K 2250lm)

— C0/C180 cd / 1000 lm - - - C90/C270

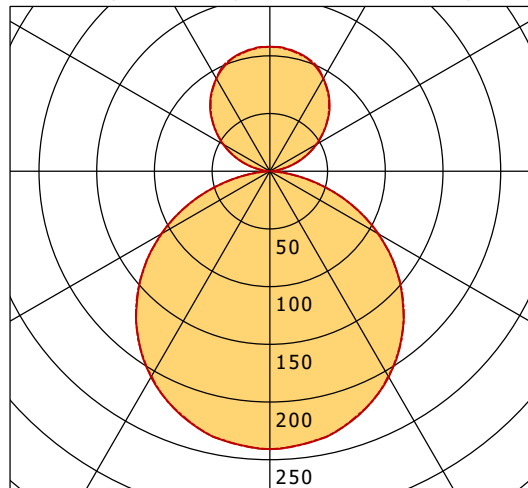

	C0	C90	C180	C270
0°	241	241	241	241
30°	206	205	206	205
60°	109	108	109	108
90°	1	1	1	1
120°	47	46	47	46
150°	93	93	93	93
180°	108	108	108	108
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η Efficiency	LED 90 lm/W
Direct/Indirect	↓ 69% / ↑ 31%
System Power	25 W
UGR Reflection factors	X=4H, Y=8H 70/50/20
UGR C0/C180	21.1
UGR C90/C270	21.1
CIE Flux Codes	47 79 96 69 100
Ra/CRI	> 80