


FLCA-P 415.135.40


FLC Pendant (1xLED 106W 840/4000K 13350lm 100 °)

— C0/C180 cd / 1000 lm - - - C90/C270

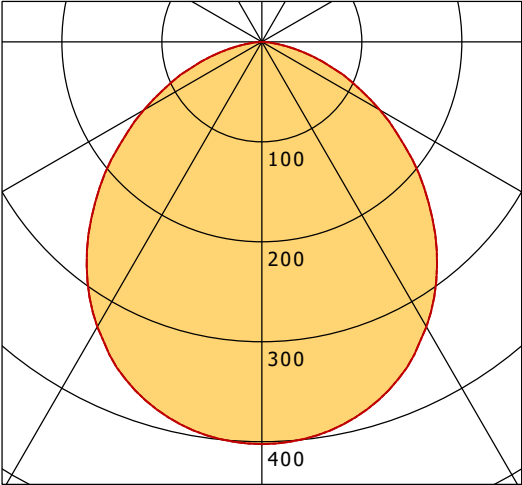

	C0	C90	C180	C270
0°	402	402	402	402
15°	385	385	385	385
30°	329	329	329	329
45°	239	239	239	239
60°	136	136	136	136
75°	48	48	48	48
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

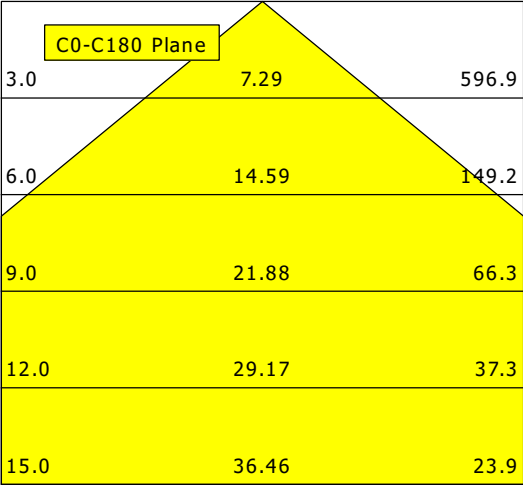

η		LED
Efficiency		126 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		106 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		30.3
UGR C90/C270		30.3
CIE Flux Codes		53 84 97 100 100
Ra/CRI		> 80