



# CAPL 300.2027.55

CAP 300 (1xLED 27W 827/2700K 2700lm 55 °)

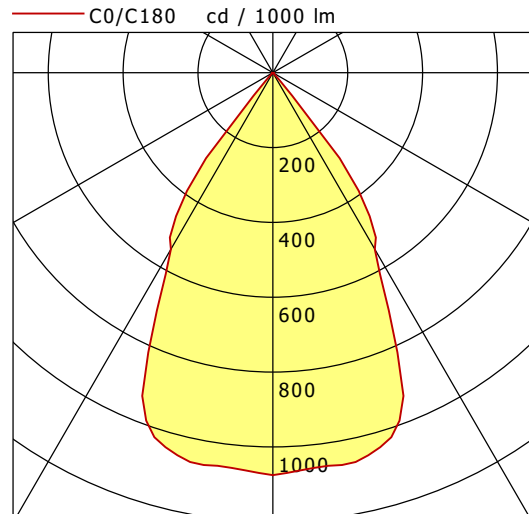

	C0	C90	C180	C270
0°	1075	1075	1075	1075
15°	1048	1048	1048	1048
30°	545	545	545	545
45°	3	3	3	3
60°	3	3	3	3
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

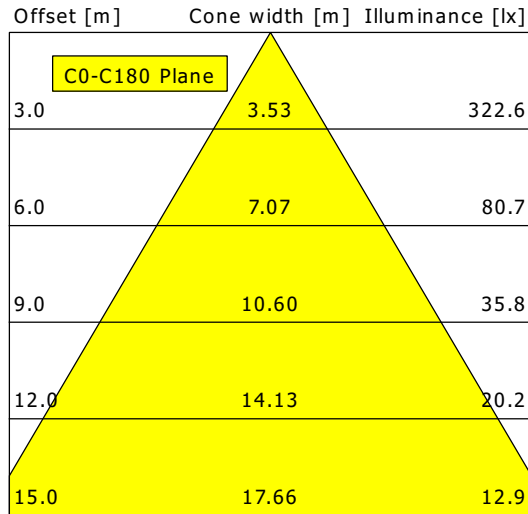

<b>η</b>	LED
Efficiency	100 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	27 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	13.1
UGR C90/C270	13.1
CIE Flux Codes	99 100 100 100 100
Ra/CRI	>80