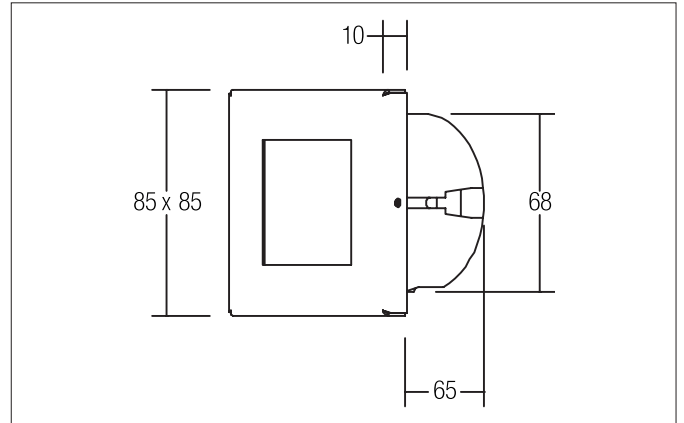


**TEDO-S LED wall recessed light**

Article no. 10140203

Light.  
For Generations.**Tender**

LED wall recessed light, Square. Ceiling cut-out Ø 68 mm, Installation depth 65 mm, Weight 0,237 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, opal cover. Luminous flux 40 lm, Power 1 x 1,2 W, System Efficiency 33 lm/W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Stainless steel, Colour: Stainless steel, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20. With electronic driver, on/off switchable.

| Article data       |                         |
|--------------------|-------------------------|
| Article no.        | 10140203                |
| GTIN               | 4250047767657           |
| Series name        | TEDO-S                  |
| Short description  | LED wall recessed light |
| Material           | Stainless steel         |
| Colour             | Stainless steel         |
| Type of surface    | Matt                    |
| Shape              | Square                  |
| Built-in diameter  | 68 mm                   |
| Installation depth | 65 mm                   |
| Width              | 85 mm                   |
| Hight              | 85 mm                   |
| Weight             | 0.237 kg                |

**TEDO-S LED wall recessed light**

Article no. 10140203

Light.  
For Generations.

| Lighting technology |           |
|---------------------|-----------|
| Colour temperature  | 3.000 K   |
| Light colour        | White     |
| Luminous flux       | 40 lm/m   |
| System efficiency   | 33 lm/W   |
| Colour rendering    | CRI > 80  |
| Reflector           | Without   |
| Light sharing       | Symmetric |

| Operating technology of the luminaire |        |
|---------------------------------------|--------|
| System output                         | 1.2 W  |
| Voltage type                          | AC     |
| AC nominal voltage max                | 230 V  |
| Frequenz max.                         | 50 Hz  |
| Lamp                                  | LED    |
| Protection class                      | I      |
| Degree of protection                  | IP20   |
| Dimmable                              | No     |
| Control                               | on/off |
| Bulb change possible                  | Yes    |

| Operating technology of driver |           |
|--------------------------------|-----------|
| Protection class               | II        |
| Degree of protection           | IP66      |
| Control                        | on/off    |
| Version                        | Plug&Play |

| Mounting technology   |                   |
|-----------------------|-------------------|
| Mounting method       | Recessed mounting |
| Place of installation | Wall-mounted      |
| Adjustability         | Not adjustable    |
| Material cover        | Plastic, opal     |

| Packing data            |   |
|-------------------------|---|
| Gross weight            | 0.268 kg  |
| Length of packaging     | 95 mm   |
| Packaging width         | 75 mm   |
| Packaging height        | 95 mm   |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.<br>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |