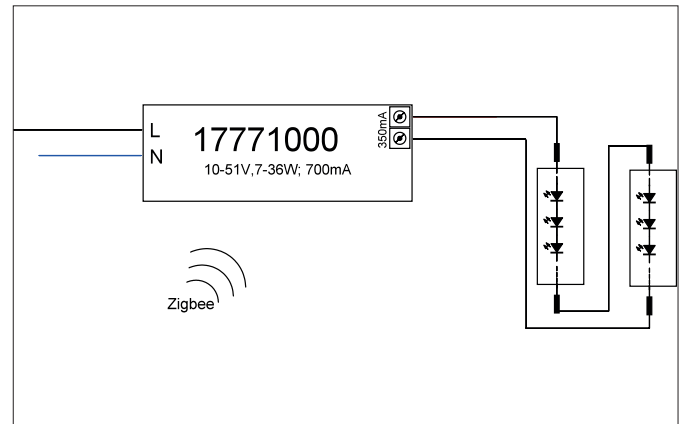


**LED converter 700mA, ZigBee dimmable**

Article no. 1777 1020

Light.  
For Generations.**Tender**

LED converter 700mA, ZigBee dimmable. This driver fulfills the requirements for safety lighting systems in accordance with DIN EN 50 172 VDE 0108-100:2005-01. This converter is equipped with safety devices which protect it against overvoltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 1.5 mm<sup>2</sup>. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 700 mA, Voltage: 230V AC 50Hz, Power: 36W, dimmable: Yes, Control: Zigbee.

Article data	
Article no.	1777 1020
GTIN	425 1433926672
Short description	LED converter 700mA, ZigBee dimmable
Material	Plastic
Length	146 mm
Width	44 mm
Height	30 mm
Scope of delivery	Plug&Play version with 110 mm P&P output cable
Weight	0.198 kg

**LED converter 700mA, ZigBee dimmable**

Article no. 17771020

Light.  
For Generations.

Operating technology of driver	
AC nominal voltage min	220 V
AC nominal voltage max	240 V
Frequenz max.	50 Hz
DC nominal voltage min	198 V
DC nominal voltage max	276 V
Current	700 mA
Protection class	II
Degree of protection	IP20
Starting current	5A 50µs
Power min	7 W
Power	36 W
Control	Zigbee
Environment temperature (ta)	-25 °C bis +45 °C
Measure point (tc)	max. +80 °C
Version	Plug&Play + connection box
Power factor	0.95

Packing data	
Gross weight	0.265 kg
Length of packaging	90 mm
Packaging width	55 mm
Packaging height	109 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>