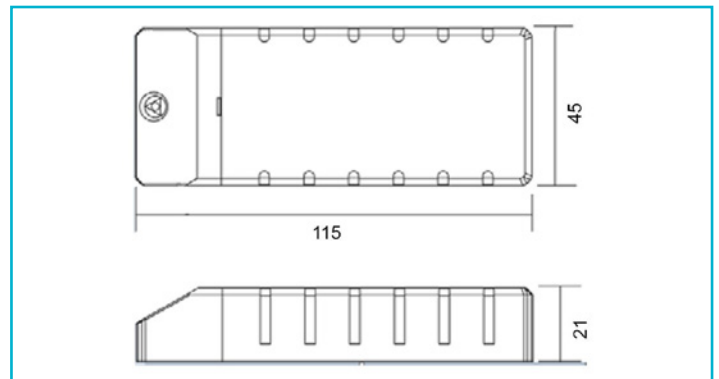


**Special features**

- Compact design
- Flicker-free
- Short-circuit-proof, overload protection, overheating protection

Housing Material	Plastic
Housing Color	Black
Functions	Short-circuit proof, Lamp control gear 110, Furniture installation, Protective extra-low voltage, Overloading protection, Overtemperature protection

Operating Mode	Constant current
Protection Class	Protection class II/protective insulation
Power	0.7-18 W
Output Voltage	2-52 V/DC
Output Current	350 mA
Power Factor	0.85
Connection Type	Clamp

Number of Circuit Breaker B10A max.	17
Number of Circuit Breaker B16A max.	28
Number of Circuit Breaker C10A max.	37
Number of Circuit Breaker C16A max.	59
Inrush Current max.	10 A / 300 μs
Capacitive Load	147 nF
Reference Point Tc	85 °C
Working Temperature	-20 to 50 °C
IP Protection Class	IP 20

Length	115 mm
Width	45 mm
Height	21 mm
Product weight	87 g

