

## Panel mounting socket outlet, straight - flange 56x56, fixing centers 44x44




Product description	
BALS-Prd.-Nr	13659
EAN	4024941136594
Product category	Panel mounting socket outlet Quick-Connect, straight
Current	16A
Number of poles	3p
Poles	2P+PE
Position of earth contact	10 h
Voltage	> 50V

Product description	
Frequency	100 up to 300Hz
Protection degree	IP44
Colour code	green RAL 6002
Colour of appliance	Hinged lid green RAL 6002, Enclosure grey RAL 7035
Connection design	screwless spring terminals as cage clamp with Kontex-contact
Maximum conductor size	4,0 qmm
Cable entry	other
Height	72mm
Width	56mm
Depth	89mm
Flange size vertical	56mm
Flange size horizontal	56mm
Drill hole distance vertical	44mm
Drill hole distance horizontal	44mm
Material of enclosure	Polyamide
Contact	The contact carrier is made of polyamide, The contacts are brass

Logistics data	
Weight/pcs	0.087 kg / Piece
Packaging	Bag

Logistics data	
Content amount	1 ST
EAN	4024941136594
Length	89 mm
Width	56 mm
Height	72 mm
Weight	0.088 kg
Volume	358.848 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941828925
Length	207 mm
Width	162 mm
Height	142 mm
Weight	0.97 kg
Volume	3,750 ccm

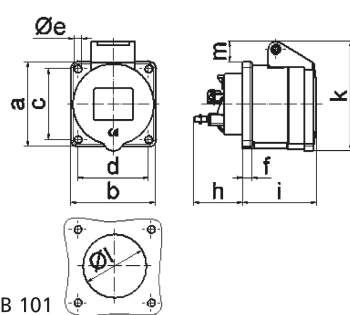

4 MB 101

Ampere Polzahl	16	16				
	3	4				
a	56,0	60,0				
b	56,0	60,0				
c	44,0	50 - 52				
d	44,0	50 - 52				
e Ø	4,4	5,5				
f	7,0	7,0				
h	35,5	35,5				
i	51,0	53,0				
k	70,0	80,0				
l Ø	45,0	45,0				
m	13,0	9,0				
Leiter mm <sup>2</sup> min	1,5	1,5				
Leiter mm <sup>2</sup> max	4	4				