


PLL 52.600.40.1/DALI

PL 52 (1xLED 46W 840/4000K 6150lm)

— C0/C180 cd / 1000 lm - - - C90/C270

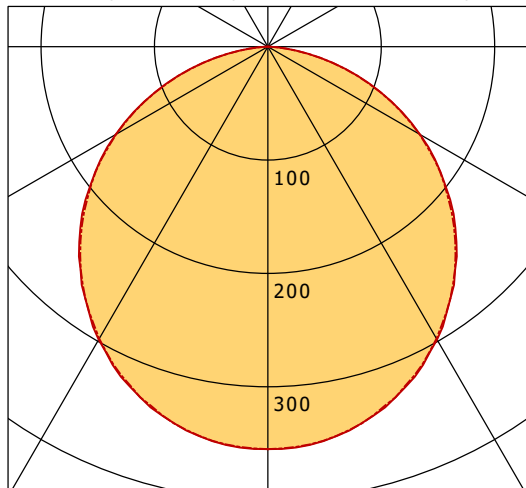

	C0	C90	C180	C270
0°	355	355	355	355
15°	340	340	340	340
30°	298	297	298	297
45°	235	233	235	233
60°	155	155	155	155
75°	65	65	65	65
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	C0-C180 Plane	C90-C270 Plane	Illuminance [lx]
3.0	8.91 8.84		242.6
6.0	17.82 17.69		60.6
9.0	26.73 26.53		27.0
12.0	35.64 35.38		15.2
15.0	44.55 44.22		9.7

η	LED
Efficiency	134 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	46 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.5
UGR C90/C270	22.4
CIE Flux Codes	47 79 96 100 100
Ra/CRI	>80