


# FLIQ 200.2040.01/DALI


Flix 200 Square (FLIQZ 200.05, 1xLED 27W 840/4000K 2800lm 70 °)

— C0/C180 cd / 1000 lm    - - - C90/C270

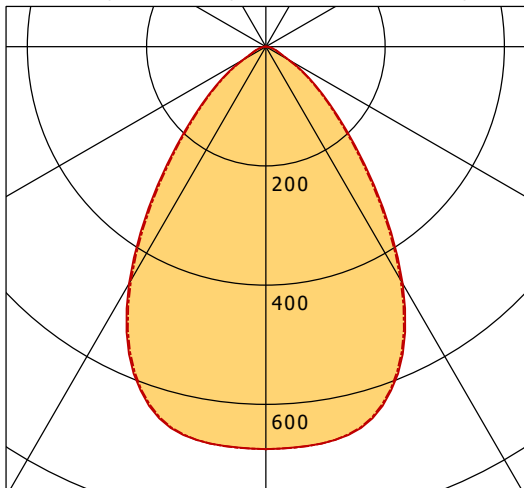

	C0	C90	C180	C270
0°	675	675	675	675
15°	654	653	654	653
30°	459	452	459	452
45°	180	174	180	174
60°	45	43	45	43
75°	12	12	12	12
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

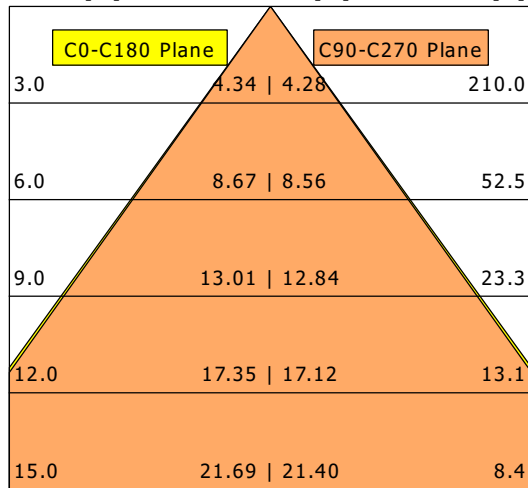

<b>η</b>	LED
Efficiency	104 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	27 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	26.7
UGR C90/C270	26.5
CIE Flux Codes	77 96 99 100 100
Ra/CRI	>80