


# NEO-ORYO-P 101.927.15/DALI

NeoORYO 100 | Pendant | 48 V (1xLED 21W 927/2700K 1370lm)

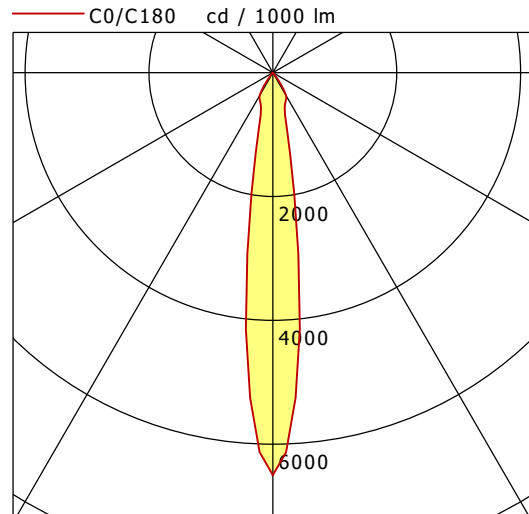

	C0	C90	C180	C270
0°	6500	6500	6500	6500
15°	810	810	810	810
30°	427	427	427	427
45°	14	14	14	14
60°	11	11	11	11
75°	1	1	1	1
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
<b>C0-C180 Plane</b>		
3.0	0.79	989.4
6.0	1.57	247.4
9.0	2.36	109.9
12.0	3.15	61.8
15.0	3.93	39.6

<b>η</b>	LED
Efficiency	65 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	21 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.7
UGR C90/C270	19.7
CIE Flux Codes	97 100 100 100 100
Ra/CRI	>90