


# FLIR 100.1027.15/DALI

Flix 100 Round (FLIRZ 100.05, 1xLED 15W 827/2700K 1310lm 15 °)

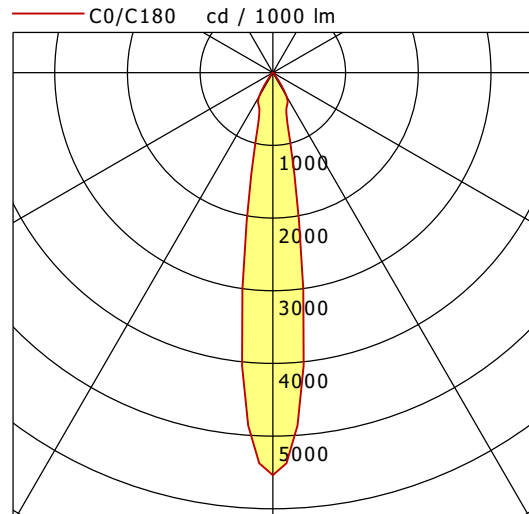

	C0	C90	C180	C270
0°	5537	5537	5537	5537
15°	842	842	842	842
30°	377	377	377	377
45°	30	30	30	30
60°	19	19	19	19
75°	9	9	9	9
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
<b>C0-C180 Plane</b>		
3.0	0.90	806.0
6.0	1.80	201.5
9.0	2.70	89.6
12.0	3.60	50.4
15.0	4.50	32.2

<b>η</b>	LED
Efficiency	88 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	15 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.2
UGR C90/C270	22.2
CIE Flux Codes	93 97 99 100 100
Ra/CRI	>80