




- Special features**
- Robust housing
 - Flicker-free
 - Short-circuit-proof, overload protection, overheating protection
 - Compact design

Housing Material	Aluminium
Housing Color	Grey
Operating Mode	Constant voltage
Protection Class	Protection class I/protective grounding
Power	320 W
Output Voltage	24 V/DC
Output Current	0-13340 mA
Power Factor	0.95
Connection Type	Open cables
Primary Connection	With free strand / conductor ends
Secondary Connection	Open cables
Number of Circuit Breaker B10A max.	2
Number of Circuit Breaker B16A max.	3
Number of Circuit Breaker C10A max.	3
Number of Circuit Breaker C16A max.	6
Inrush Current max.	85 A / 300 µs
Capacitive Load	626.3 nF
Reference Point Tc	90 °C
Working Temperature	-40 to 50 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 67
Life Time	50000 h
Length	252 mm
Width	90 mm
Height	44 mm
Product weight	1760 g

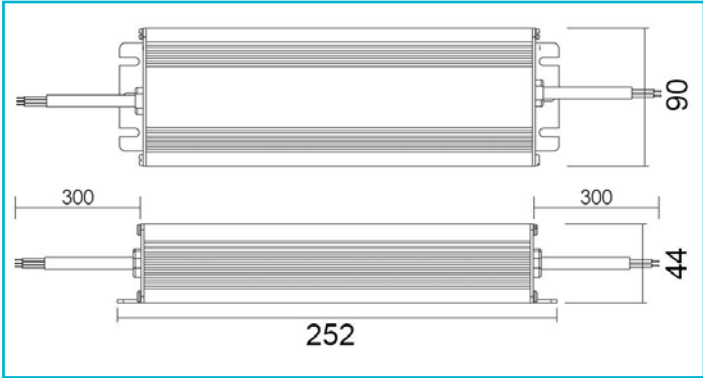