


DEHNguard modular DG M TNC 440 (FM)

- DE Einbauanleitung
- GB Installation instructions
- IT Istruzioni di montaggio
- FR Instructions de montage
- NL Montagehandleiding
- ES Instrucciones de montaje
- PT Instruções de montagem
- DK Monteringsvejledning
- SE Monteringsanvisning
- FI Asennusohje
- GR Οδηγίες συναρμολόγησης
- PL Instrukcja montażu
- CZ Montážní návod
- TR Kurulum Talimatları
- RU Инструкция по монтажу
- CN 安装说明
- HU Szerelési útmutató
- JP 設置説明書



II IEC 61643-11...
2 EN 61643-11...


PZ 2 4 Nm

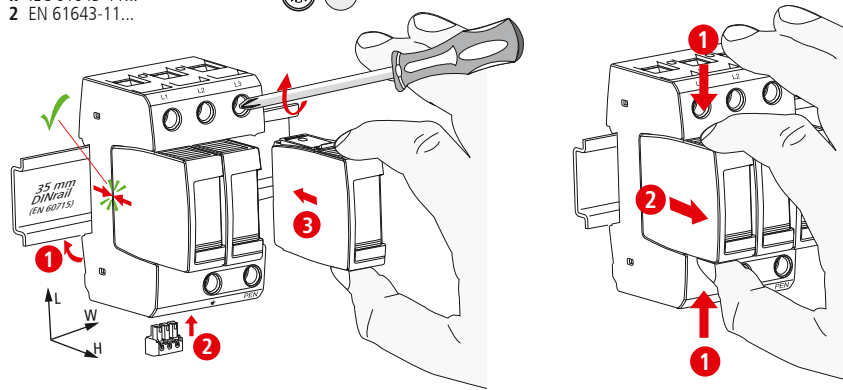

DG M TNC 440 (FM)	
	DG MOD 440
U_N / Tol.: $\pm 10\%$	400 V
U_c	440 V
f_N	50 / 60 Hz
max.	125 A gG
I_{SCCR}	25 kA _{ms}
I_{max}	40 kA
θ	-40°C ... + 80°C
ϕ	5% ... 95%
I_{PE}	< 0.2 mA
IP *)	20
L x W x H	90 mm x 54 mm x 73 mm



min. \square L1, L2, L3, PEN, \perp	1.5 mm ²		
max. \square L1, L2, L3, PEN, \perp	25 mm ²	35 mm ²	
\square	16 mm ² Cu ≥ 15.5 mm		

TN -C DG M TNC 440 (FM)

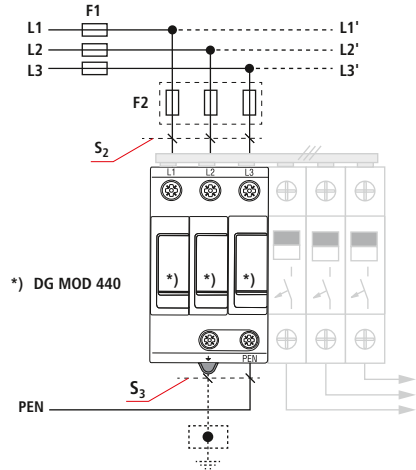

DEHNguard DG M TNC 440 (FM)	
	F1 > 125 A gG
	F2 ≤ 125 A gG
	F1 ≤ 125 A gG

DEHNguard DG M TNC 440 (FM)			
F1 A gG	S ₂ / mm ²	S ₃ / mm ²	F2 A gG
25	2.5	6	---
35	4	6	---
40	4	6	---
50	6	6	---
63	10	10	---
80	10	10	---
100	16	16	---
125	16	16	---
>125	16	16	125

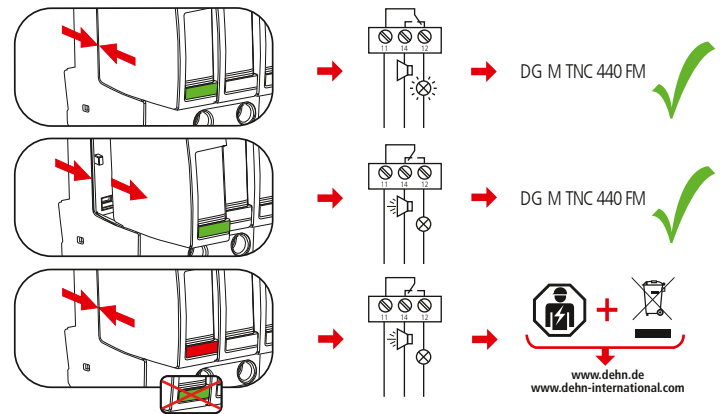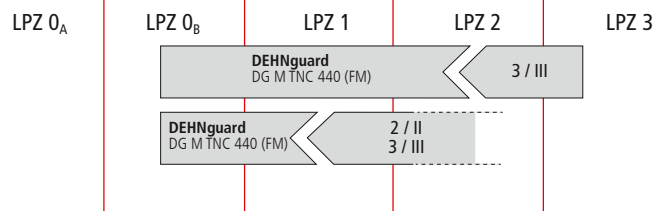

DEHNguard DG M TNC 440 (FM)	
	U_N / I_N
	AC: 250 V / 0.5 A
	DC: 250 V / 0.1 A
	125 V / 0.2 A
	75 V / 0.5 A
	max. 1.5 mm ²

