



Button Evo | Surface-Mounted (1xLED 20W 930/3000K 2530lm 30°)

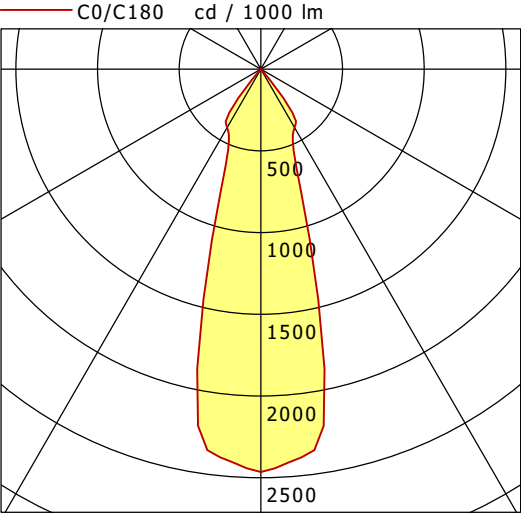

	C0	C90	C180	C270
0°	2465	2465	2465	2465
15°	1260	1260	1260	1260
30°	413	413	413	413
45°	2	2	2	2
60°	0	0	0	0
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

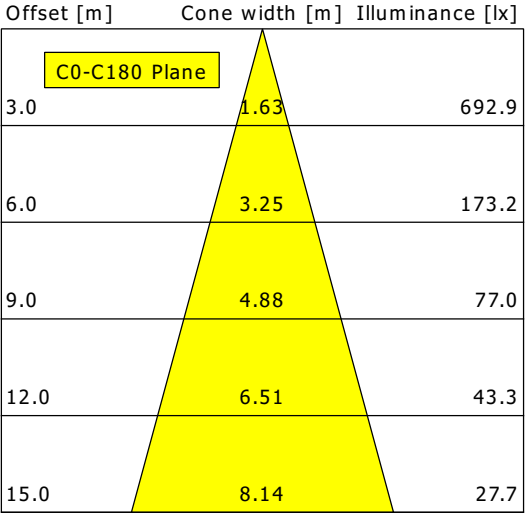

η		LED
Efficiency		127 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		20 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		17.4
UGR C90/C270		17.4
CIE Flux Codes	100 100 100 100 100	
Ra/CRI		>90