

## Wall mounting appliance inlet - with external fixing




| Product description       |                                             |
|---------------------------|---------------------------------------------|
| BALS-Prd.-Nr              | 24423                                       |
| EAN                       | 4024941244237                               |
| Product category          | Wall mounting appliance inlet Quick-Connect |
| Current                   | 16A                                         |
| Number of poles           | 3p                                          |
| Arrangement of phases     | 2P+PE                                       |
| Position of earth contact | 6 h                                         |
| Voltage                   | 200 - 250V~                                 |
| Frequency                 | 50/60Hz                                     |

| Product description    |                                                                               |
|------------------------|-------------------------------------------------------------------------------|
| Protection degree      | IP44                                                                          |
| Colour code            | blue RAL 5015                                                                 |
| Colour of appliance    | Housing top blue RAL 5015, Collar blue RAL 5015, Housing bottom grey RAL 7035 |
| Connection design      | screwless spring-clamp technology                                             |
| Maximum conductor size | 2,5 qmm                                                                       |
| Cable entry            | top entry M20                                                                 |
| Height                 | 121mm                                                                         |
| Width                  | 72mm                                                                          |
| Depth                  | 72mm                                                                          |
| Dimension of enclosure | 90x72 mm (HxW)                                                                |
| Material of enclosure  | Polyamide                                                                     |
| Contacts               | The contact carrier is made of polyamide, The contacts are brass              |

| Additional technical properties |                                                             |
|---------------------------------|-------------------------------------------------------------|
|                                 | The cable entry is one at top open and one at bottom closed |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.145 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |
| EAN            | 4024941244237    |

| Logistics data |               |
|----------------|---------------|
| Length         | 72 mm         |
| Width          | 72 mm         |
| Height         | 121 mm        |
| Weight         | 0.146 kg      |
| Volume         | 627.264 ccm   |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941958141 |
| Length         | 275 mm        |
| Width          | 175 mm        |
| Height         | 137 mm        |
| Weight         | 1.575 kg      |
| Volume         | 5,737.5 ccm   |

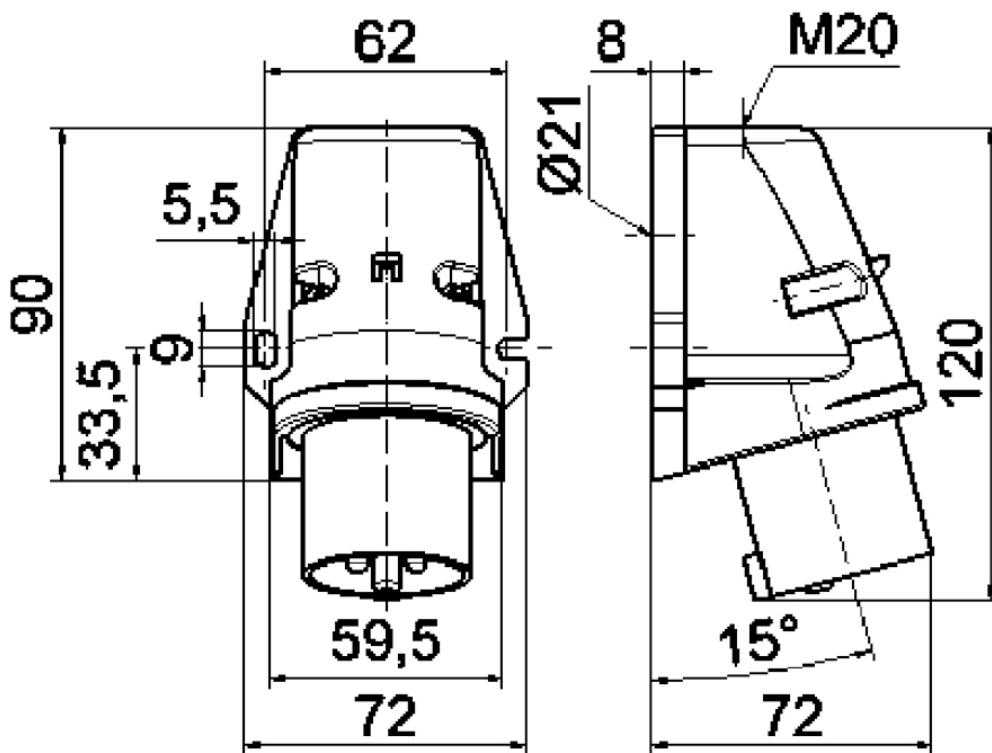

5 MB 163