


ML-A 070.0730.11 APB/DALI


Monoline 070 Surface-Mounted & Pendant (1xLED 13W 830/3000K 1120lm)

— C0/C180 cd / 1000 lm - - - C90/C270

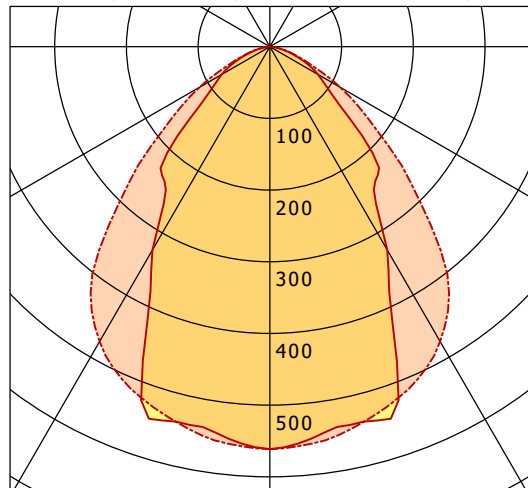

| | C0 | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0° | 561 | 561 | 561 | 561 |
| 15° | 540 | 537 | 540 | 537 |
| 30° | 327 | 475 | 327 | 475 |
| 45° | 193 | 287 | 193 | 287 |
| 60° | 78 | 114 | 78 | 114 |
| 75° | 24 | 27 | 24 | 27 |
| 90° | 0 | 0 | 0 | 0 |
| cd / 1000 lm | | | | |

Offset [m] Cone width [m] Illuminance [lx]

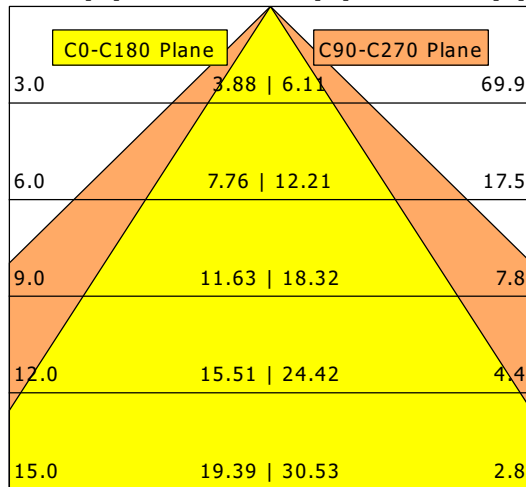

| | |
|--------------------|------------------|
| η | LED |
| Efficiency | 86 lm/W |
| Direct/Indirect | ↓ 100% / ↑ 0% |
| System Power | 13 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 17.2 |
| UGR C90/C270 | 18.3 |
| CIE Flux Codes | 66 91 99 100 100 |
| Ra/CRI | >80 |