


ML-A 060.1040.11 AOV/DALI


Monoline 060 | Surface-Mounted (1xLED 20W 840/4000K 2460lm)

— C0/C180 cd / 1000 lm - - - C90/C270

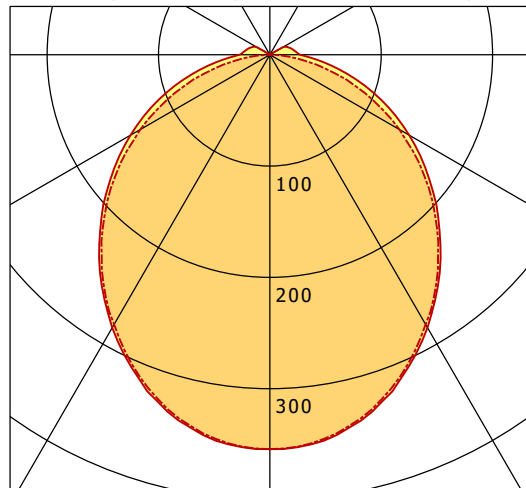

	C0	C90	C180	C270
0°	354	354	354	354
15°	336	334	336	334
30°	283	280	283	280
45°	215	211	215	211
60°	145	134	145	134
75°	76	56	76	56
90°	27	2	27	2
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

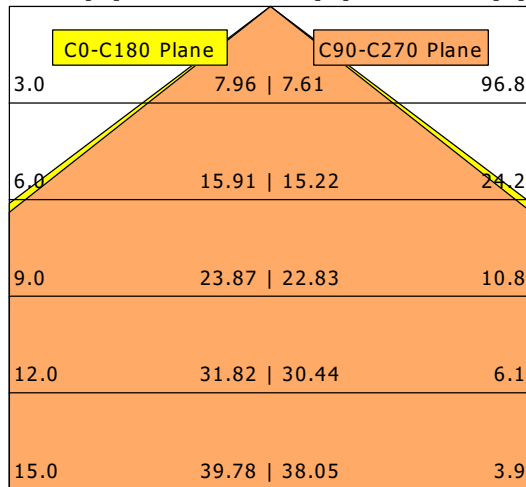

η	LED
Efficiency	123 lm/W
Direct/Indirect	↓ 96% / ↑ 4%
System Power	20 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.9
UGR C90/C270	23.4
CIE Flux Codes	47 77 94 96 100
Ra/CRI	>80