


**Special features**

- Can be dimmed using leading-edge/trailing-edge phase dimmers
- Flicker-free
- Short-circuit-proof, overload protection, overheating protection

Housing Material	Plastic
Housing Color	Black
Operating Mode	Constant current
Protection Class	Protection class II/protective insulation
Power	9.8-20 W
Output Voltage	28-57 V/DC
Output Current	350 mA
Dimmable	Yes
Control	Trailing-edge dimmer
Number of Channels	1
Power Factor	0.97
Connection Type	Clamp
Number of Circuit Breaker B10A max.	11
Number of Circuit Breaker B16A max.	18
Number of Circuit Breaker C10A max.	24
Number of Circuit Breaker C16A max.	39
Inrush Current max.	15 A / 300 μ s
Capacitive Load	30.58 nF
Reference Point Tc	90 °C
Working Temperature	-20 to 45 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 20
Life Time	30000 h
Length	127 mm
Width	44 mm
Height	28 mm
Product weight	113 g

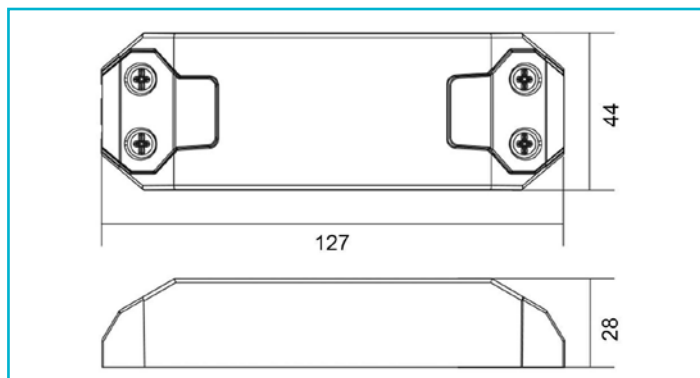