



VTRXS 12.0530.25

Vale-Tu Round XSmall (1xLED 12W 830/3000K 1120lm)

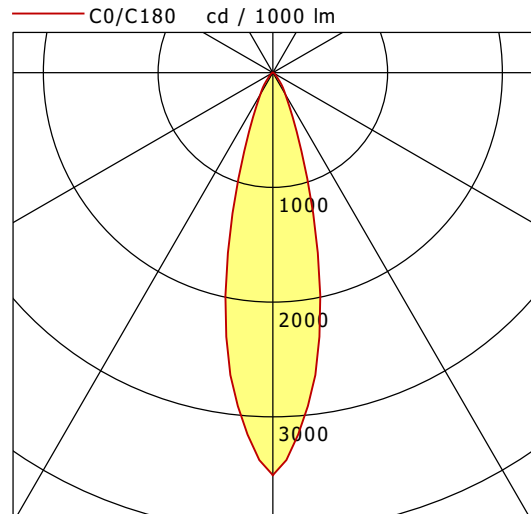

	C0	C90	C180	C270
0°	3508	3508	3508	3508
15°	1444	1444	1444	1444
30°	217	217	217	217
45°	43	43	43	43
60°	14	14	14	14
75°	7	7	7	7
90°	0	0	0	0
cd / 1000 lm				

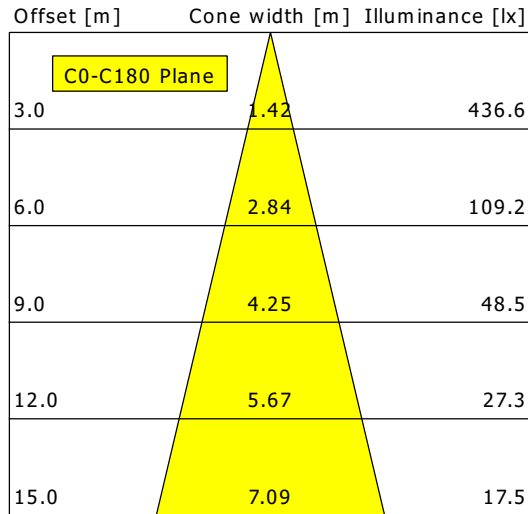

η	LED
Efficiency	94 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	12 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.6
UGR C90/C270	21.6
CIE Flux Codes	94 98 100 100 100
Ra/CRI	>80