



# FLIR 400.2030.01

Flix 400 Round (FLIRZ 400.05, 1xLED 21W 830/3000K 2170lm 75 °)

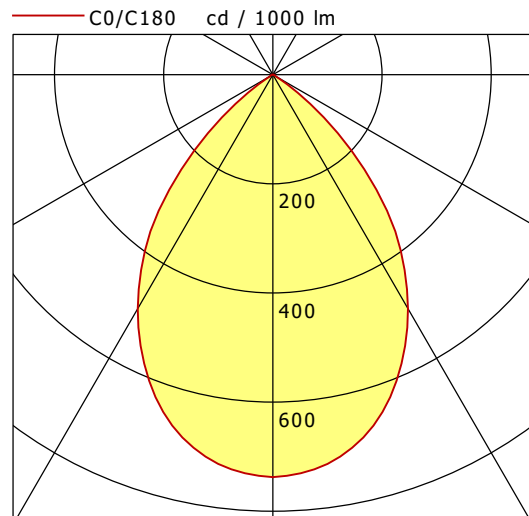

|              | C0  | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0°           | 738 | 738 | 738  | 738  |
| 15°          | 677 | 677 | 677  | 677  |
| 30°          | 495 | 495 | 495  | 495  |
| 45°          | 221 | 221 | 221  | 221  |
| 60°          | 7   | 7   | 7    | 7    |
| 75°          | 4   | 4   | 4    | 4    |
| 90°          | 0   | 0   | 0    | 0    |
| cd / 1000 lm |     |     |      |      |

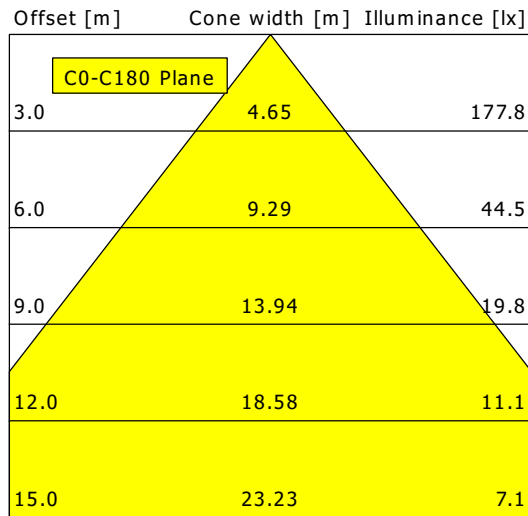

|                    |                   |
|--------------------|-------------------|
| <b>η</b>           | LED               |
| Efficiency         | 103 lm/W          |
| Direct/Indirect    | ↓ 100% / ↑ 0%     |
| System Power       | 21 W              |
| <b>UGR</b>         | X=4H, Y=8H        |
| Reflection factors | 70/50/20          |
| UGR C0/C180        | 19.6              |
| UGR C90/C270       | 19.6              |
| CIE Flux Codes     | 81 99 100 100 100 |
| Ra/CRI             | >80               |