

Plug TN - with cable gland, with closure cap




Product description	
BALS-Prd.-Nr	210403
EAN	4024941108218
Product category	QUICK-CONNECT TN plug
Current	16A
Number of poles	3p
Poles	2P+PE
Position of earth contact	2 h
Voltage	> 50V
Frequency	over 300 up to 500Hz

Product description	
VG-Type-No.:	VG 96919 CP 039
Protection degree	IP67
Colour code	bronze-green RAL 6031-F9
Colour of appliance	Cable gland bronze-green RAL 6031-F9, Bayonet ring bronze-green RAL 6031-F9, Housing cover bronze-green RAL 6031-F9, Collar bronze-green RAL 6031-F9, Closure cap bronze-green RAL 6031-F9
Connection design	screwless spring-clamp technology
Maximum conductor size	2,5 qmm
Cable entry	Cable gland
Height	154mm
Width	70.5mm
Depth	76mm
Material of enclosure	Polyamide
Contact	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Additional technical properties	
	For cable diameter from 8 up to max. 18 mm, Multi-Grip cable gland with gasket, integrated cable clamp and additional water evacuation openings
	With closure cap

Logistics data	
Weight/pcs	0.22 kg / Piece

Logistics data	
Packaging	Bag
Content amount	1 ST
EAN	4024941108218
Length	76 mm
Width	70.5 mm
Height	154 mm
Weight	0.221 kg
Volume	825.132 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941838986
Length	245 mm
Width	177 mm
Height	185 mm
Weight	2.333 kg
Volume	7,140 ccm

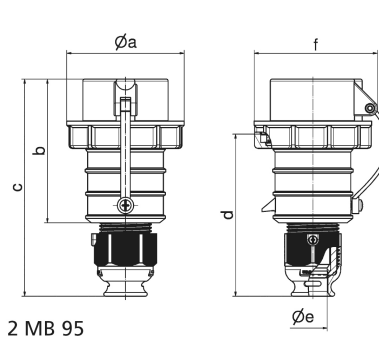

2 MB 95

Ampere	16	16	16	32	32	32
Polzahl	3	4	5	3	4	5
a ø	70,0	78,0	86,0	94,0	94,0	101,0
b	103,5	104,0	105,5	127,0	127,0	129,5
c	153,5	154,0	160,5	187,0	187,0	193,5
d	111,0	111,0	119,0	136,0	136,0	138,5
e ø	18,0	18,0	21,0	23,5	23,5	27,0
f	75,5	82,5	91,0	96,5	96,5	104,5
Leiter mm ² min	1,0	1,0	1,0	2,5	2,5	2,5
Leiter mm ² max	2,5	2,5	2,5	6,0	6,0	6,0