


# PLL 57.625.30.2/DALI

PL 57 (1xLED 52W 830/3000K 3540lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

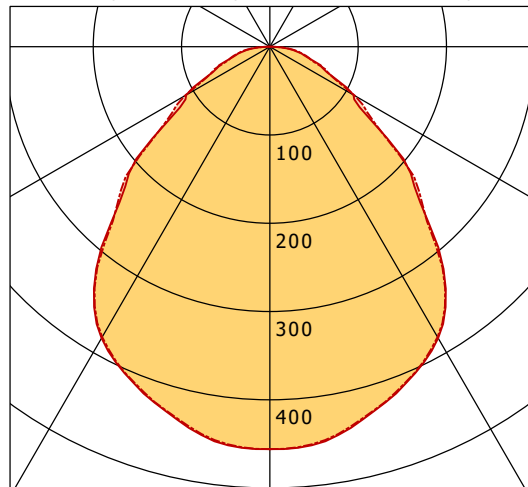

	C0	C90	C180	C270
0°	456	456	456	456
15°	432	431	432	431
30°	381	380	381	380
45°	235	242	235	242
60°	109	111	109	111
75°	42	44	42	44
90°	2	2	2	2
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

Offset [m]	C0-C180 Plane	C90-C270 Plane	Illuminance [lx]
3.0	6.24   6.44		179.3
6.0	12.48   12.88		44.8
9.0	18.71   19.31		19.9
12.0	24.95   25.75		11.2
15.0	31.19   32.19		7.2

<b>η</b>	LED
Efficiency	68 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	52 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.4
UGR C90/C270	18.5
CIE Flux Codes	59 86 97 100 100
Ra/CRI	>80