


# ML-A 060.1040.11 U16DB/DALI


Monoline 060 | Surface-Mounted | Glare Control (1xLED 15W 840/4000K 1540lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

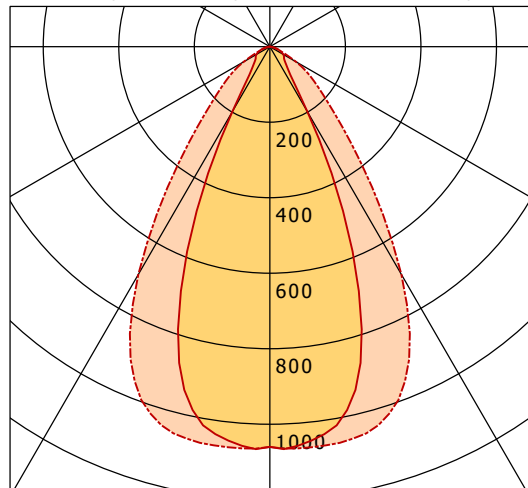

	C0	C90	C180	C270
0°	1060	1060	1060	1060
15°	907	1050	907	1050
30°	198	697	198	697
45°	57	230	57	230
60°	41	79	41	79
75°	18	11	18	11
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

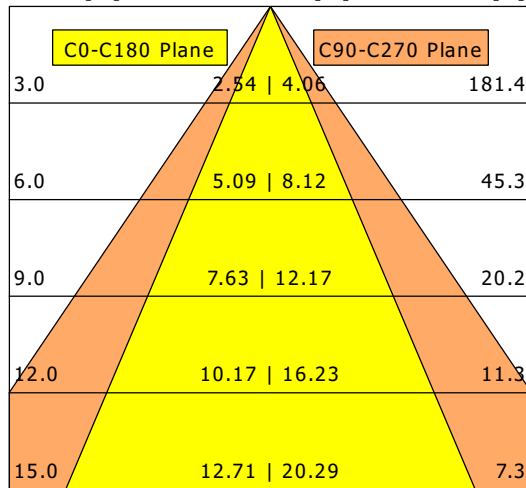

<b>η</b>	LED
Efficiency	103 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	15 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	14.8
UGR C90/C270	16.1
CIE Flux Codes	85 96 99 100 100
Ra/CRI	>80