lightnet

Ringo Star-G3

Pendant luminaire - Direct light distribution





Illustrations may only be similar and serve as an orientation.

Ringo Star-G3. LED. Pendant luminaire. Luminaire body made of aluminium profile with 60mm track width. Surface finish Jet Black. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Dimmable DALI. DxHxW (round). D=1500mm. W=60mm. H=85mm. Cord suspension for parallel installation with power supply cable and ceiling rose (Set). Pendant length max 4000mm.


Power supply: transparent. Ceiling rose: Matching luminaire`s surface colour. High-power current. 10855lm. 143W. 14,9kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

1/2

lightnet

Ringo Star-G3

Pendant luminaire - Direct light distribution

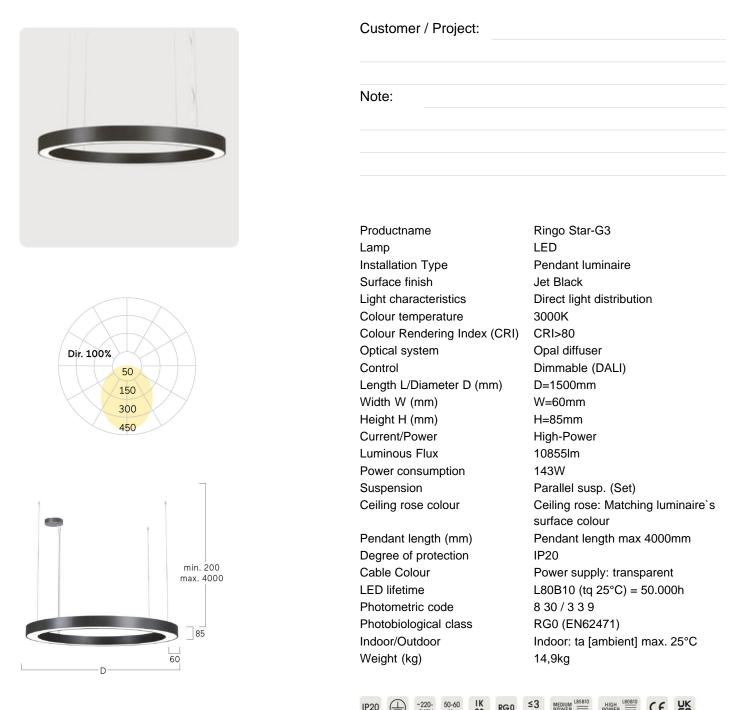

Article code: RG3OBL-830H-D1500-K