lightnet

Ringo Star-G3

Pendant luminaire - Direct light distribution





Illustrations may only be similar and serve as an orientation.

1/2


Ringo Star-G3. LED. Pendant luminaire. Luminaire body made of aluminium profile with 60mm track width. Surface finish Jet Black. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Switchable. DxHxW (round). D=600mm. W= 60mm. H=85mm. Cord suspension for parallel installation with power supply cable and ceiling rose (Set). Pendant length max 4000mm. Power supply:

transparent. Ceiling rose: Matching luminaire`s surface colour. Medium-power current. 3170lm. 37W. 6kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

lightnet

Ringo Star-G3

Pendant luminaire - Direct light distribution

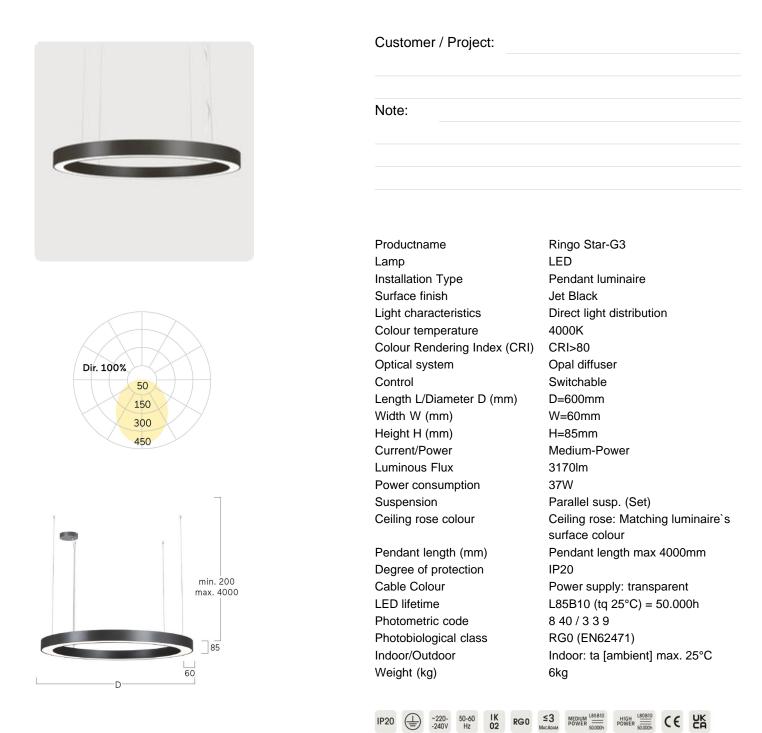

Article code: RG3OBE-840M-D600-K