


Art. no. 707146

Three-phase light Linear Pro, Tilt, 50 W, DALI, 4000 K, black

 DEKOLIGHT

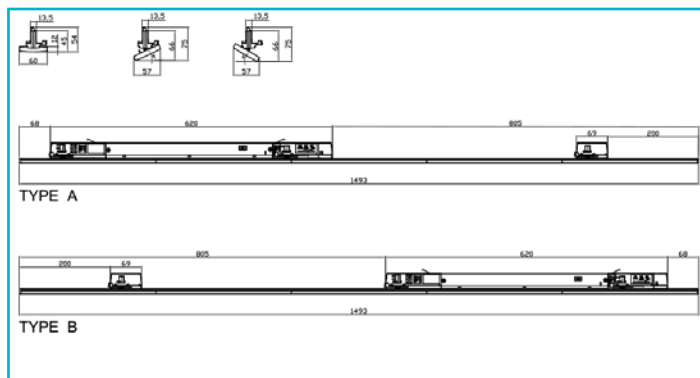

<b>Housing Material</b>	Steel	<b>Storage Temperature</b>	-40 to 85 °C
<b>Housing Color</b>	Black	<b>IP Protection Class</b>	IP 20
<b>Material of Lens</b>	PMMA	<b>IK Protection Class</b>	IK03
<b>Protection Class</b>	Protection class I/protective grounding	<b>Life Time L70 / B50</b>	60000 h
<b>Rated Input</b>	50 W	<b>Life Time L80 / B50</b>	60000 h
<b>Rated Input Voltage Frequency</b>	220-240 V/AC 50 / 60 Hz	<b>Switching Cycles</b>	100000
<b>Power Supply Unit incl.</b>	Yes	<b>Power Consumption</b>	50 kWh/1000h
<b>Connection Type</b>	Adapter	<b>Energy Efficiency Class Lightsources</b>	This product contains a light source of energy efficiency class C.
<b>Dimmable</b>	Yes		
<b>Control technology</b>	DALI 2 / DT6		
<b>Motion Detector</b>	No		
<b>Light Source</b>	LED, Light source changeable TC		
<b>Lightcolor</b>	Neutral white		
<b>Color Temperature</b>	4000 K		
<b>Colour Consistency</b>	3 SDCM		
<b>Colour Rendering Index (Ra)</b>	90		
<b>Rated Luminous Flux</b>	8000 lm		
<b>Luminous Efficiency</b>	160 lm/W		
<b>Rated Angle of Reflection</b>	60 Degree		
<b>UGR</b>	19		
<b>Light Distribution</b>	Symmetric		
<b>Swivel Angle</b>	30 Degree		
<b>Light Exit Surfaces</b>	1		
<b>Light characteristics</b>	Direct		
<b>Light direction</b>	Below		
<b>Length</b>	1493 mm		
<b>Width</b>	60 mm		
<b>Height</b>	54 mm		
<b>Working Temperature</b>	-25 to 40 °C		