

D

- Beachten Sie folgende Montageanweisungen und Hinweise:
970337 Hinweisblatt für Leuchtstoffröhren
818278 Allgemeines Hinweisblatt für LED-Leuchten
827473 Montageanweisung für AOV Abschirmfolie
Beigelegte Montageanweisungen für Verbinder, Beton- und Trimless-Einbau beachten. Einbaumontage siehe Detail ❶ (Rückseite).
- IP40 gilt nur in Verbindung mit montiertem Acrylglasprofil.** Die thermische Längenausdehnung des Aluminiumprofils beträgt bei $\Delta T = 10$ Kelvin 0.3 mm pro Meter.
- Einbaulänge:** Profillänge + 2 x 3 mm (Enddeckelstärke)
Ausschnitt: (Einbaulänge + 2 mm) x 74 mm
Einbautiefe: 100 mm
Deckenstärke: 6 - 25 mm
Spannbügelweite: max. 220 mm

GB

Consider the following installation instructions and notes:

970337 notes for fluorescent tubes
818278 general notes for LED luminaires
827473 installation instruction for AOV shielding foil
Consider the enclosed installation instructions for connectors, concrete and trimless mounting. Recessed mounting see detail ❶ (on the back).

IP40 only applies in with mounted acrylic glass profile. The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at $\Delta T = 10$ Kelvin.

Recessed length: profile length + 2 x 3 mm (thickness of end covers)

Cut-out: (recessed length + 2 mm) x 74 mm


Installation depth: 100 mm

Ceiling thickness: 6 - 25 mm

Required clamps space: max. 220 mm


LK-LED 070...

Zusammenbau mit LED Lichteinsätzen
assembly with LED light-inserts

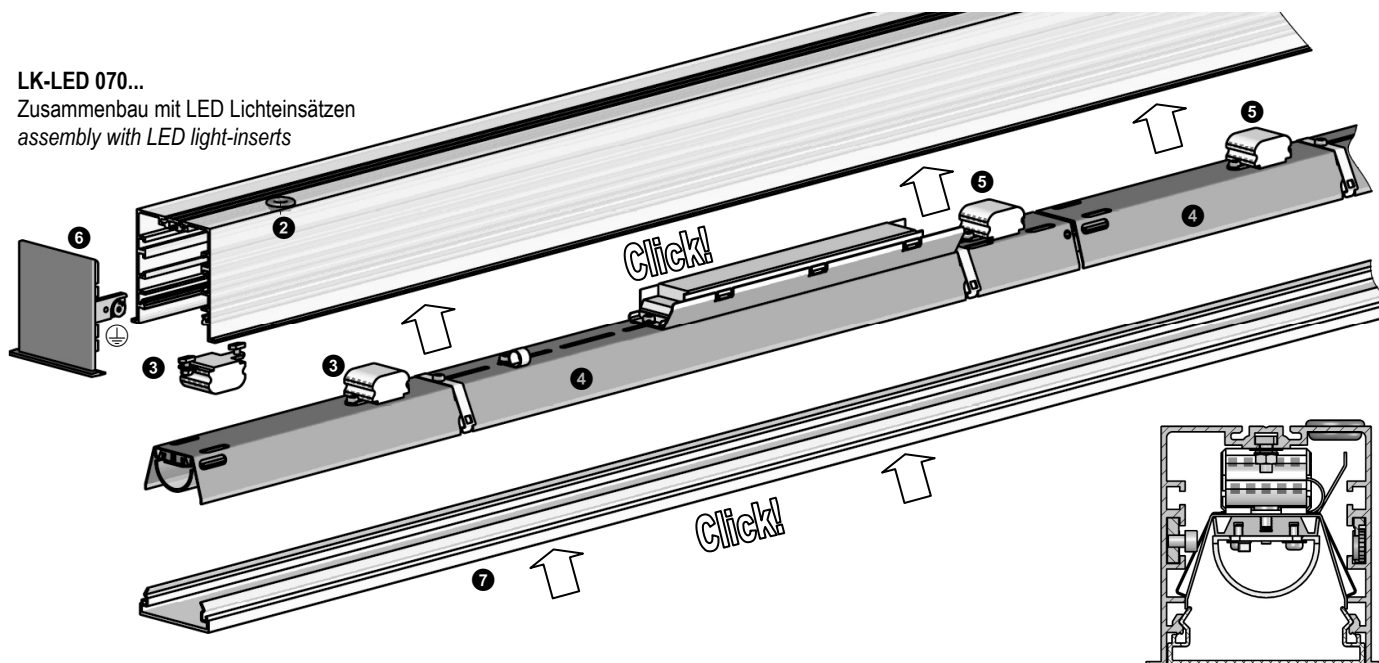

LK-T16 070...

Zusammenbau mit T16 Lichteinsätzen
assembly with T16 light-inserts

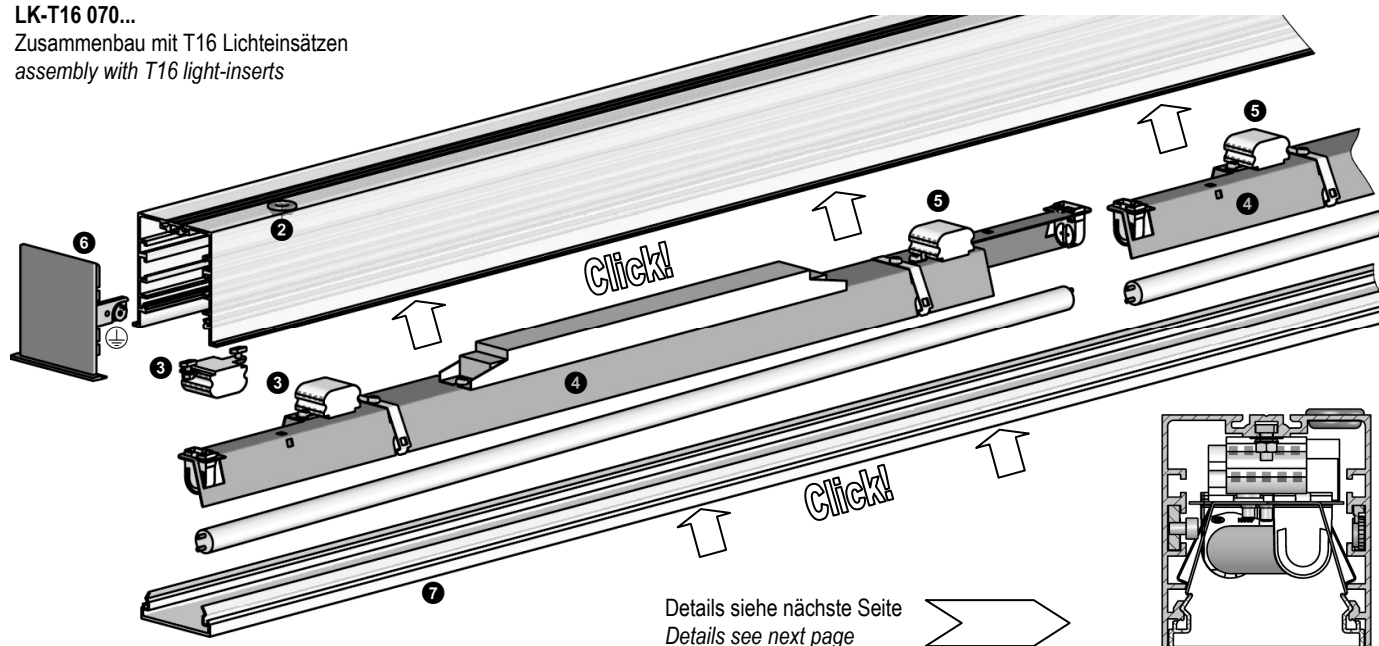

Details siehe nächste Seite
Details see next page

