




- Special features**
- Robust housing
  - Flicker-free
  - Short-circuit-proof, overload protection, overheating protection
  - Compact design

|                                     |                                         |
|-------------------------------------|-----------------------------------------|
| Housing Material                    | Aluminium                               |
| Housing Color                       | Grey                                    |
| Operating Mode                      | Constant voltage                        |
| Protection Class                    | Protection class I/protective grounding |
| Power                               | 75 W                                    |
| Output Voltage                      | 12 V/DC                                 |
| Output Current                      | 0-6250 mA                               |
| Power Factor                        | 0.97                                    |
| Connection Type                     | Open cables                             |
| Primary Connection                  | With free strand / conductor ends       |
| Secondary Connection                | Open cables                             |
| Number of Circuit Breaker B10A max. | 5                                       |
| Number of Circuit Breaker B16A max. | 8                                       |
| Number of Circuit Breaker C10A max. | 10                                      |
| Number of Circuit Breaker C16A max. | 16                                      |
| Inrush Current max.                 | 35 A / 300 $\mu$ s                      |
| Capacitive Load                     | 621.5 nF                                |
| Reference Point Tc                  | 80 $^{\circ}$ C                         |
| Working Temperature                 | -20 to 50 $^{\circ}$ C                  |
| Storage Temperature                 | -20 to 70 $^{\circ}$ C                  |
| IP Protection Class                 | IP 67                                   |
| Life Time                           | 50000 h                                 |
| Length                              | 186 mm                                  |
| Width                               | 64 mm                                   |
| Height                              | 39 mm                                   |
| Product weight                      | 785 g                                   |

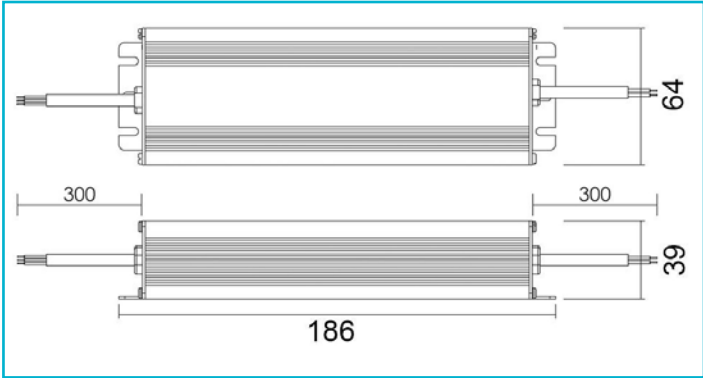