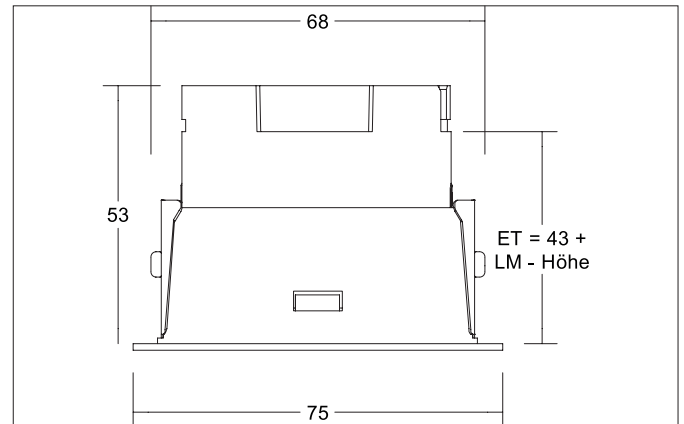


BINATO LED recessed spot, rotatable and pivoted, without LED module

Article no. 20173560

Light.
For Generations.**Tender**

Einbaustrahler, dreh- und schwenkbar, ohne LED-Modul, black structure / inside white matt, Round. In a compact design, for installation in tool-less rapid assembly systems. Alle Brumberg MR16-LED-Module sind für die Einbaueinheit BINATO verwendbar. Die Einbautiefe der Leuchte richtet sich nach dem jeweils verwendeten LED-Modul (hier: 43 mm, zzgl. Höhe des LED-Moduls). Das LED-Modul ist im Lieferumfang der Einbaueinheit nicht enthalten. Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Power: 14W, Adjustability: Rotatable and pivoted, With control gear: No, Dimmable: Depending on type of control gear, Control: Dimming depending on driver.

Product Benefits

- High color variance.
- Rotatable and pivoted.
- Leaf spring mounting.
- Interchangeable inner ring with clear glass cover .
- Color variants black and white also available as complete set with trailing-edge phase dimmable converter or DALI converter.
- DALI variant with connection box in set.

BINATO LED recessed spot, rotatable and pivoted, without LED module

Article no. 20173560

Light.
For Generations.

Article data	
Article no.	20173560
GTIN	4251433981633
Series name	BINATO
Short description	LED recessed spot, rotatable and pivoted, without LED module
Material	Aluminium / Plastic
Colour	Black / White
Type of surface	Structure
Shape	Round
Outer diameter	75 mm
Built-in diameter	68 mm
Hight	2 mm
Scope of delivery	incl. leaf spring mounting
Weight	0.078 kg

Lighting technology	
Colour temperature	Je nach verwendetem Brumberg MR16-LED-Modul
Light output	Direct
Light sharing	Symmetric

Operating technology of the luminaire	
System output	14 W
Voltage type	DC
Lamp	For LED
Protection class	III
Degree of protection	IP20
Dimmable	Depending on type of control gear
Control	Depending on driver
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Rotatable and pivoted
Swivel angle	30°
Rotation angle	355°
Max. ceiling thickness	25 mm
Further references	No cover with thermal insulation material
Material cover	Glass transparent
Circlip	Without circlip

Packing data	
Gross weight	0.11 kg
Length of packaging	85 mm
Packaging width	85 mm
Packaging hight	70 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.