










Important: Read All Instructions Prior to Installation

### **Function introduction**

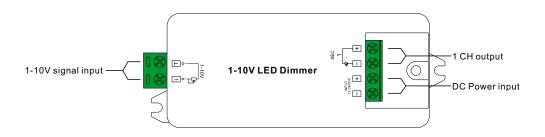

## **Product Data**

Input Voltage	Output Current	Output Power	Remarks	Size(LxWxH)
12-36VDC	1x10A	1x(120-360)W	Constant voltage	95x37x20mm

- With 1 Channel 1-10V signal Input, 1 Channel PWM Output
- Analog dim driver, receive standard 1-10V dim signal input
- 0-100% dimming range via logarithmic characteristic, perfect for human's vision
- 256 levels of Grey scales, smoothly without any flash
- To work with power repeater to expand output unlimitedly.
- Can coordinate with 1-10 regulator or 1-10V dimmer to do analog dimming ,smooth dimming curve, be in direct proportion to voltage curve of regular.
- Waterproof grade: IP20
- 0-10V version for chosen


### Safety & Warnings


- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

### Operation

When connected to Push Switch, click push switch for switch ON/OFF, hold push switch to dim up/down the brightness

# Wiring Diagram

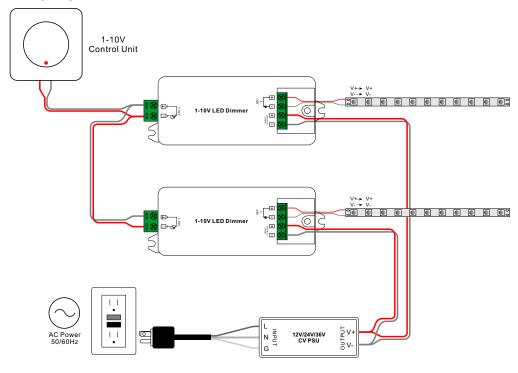

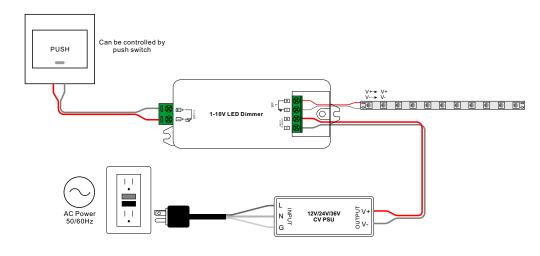

The Light Group AS, Sagmyra 2A, 4624 Kristiansand, Norway