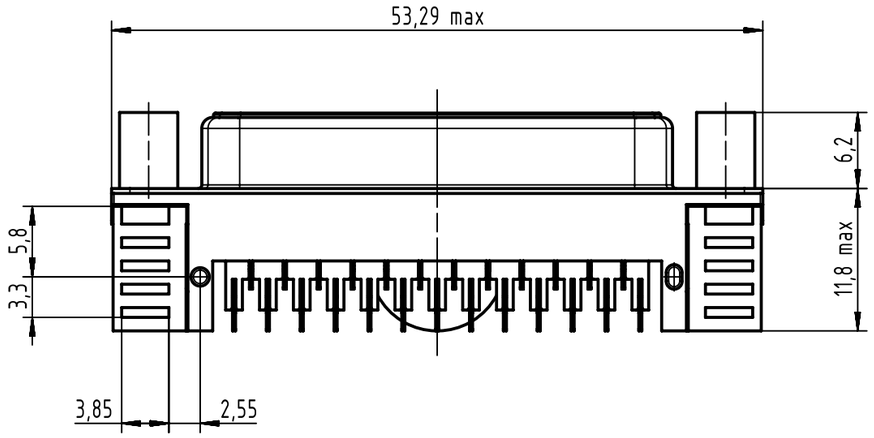

PCB layout, component side (thickness 1,6 min)

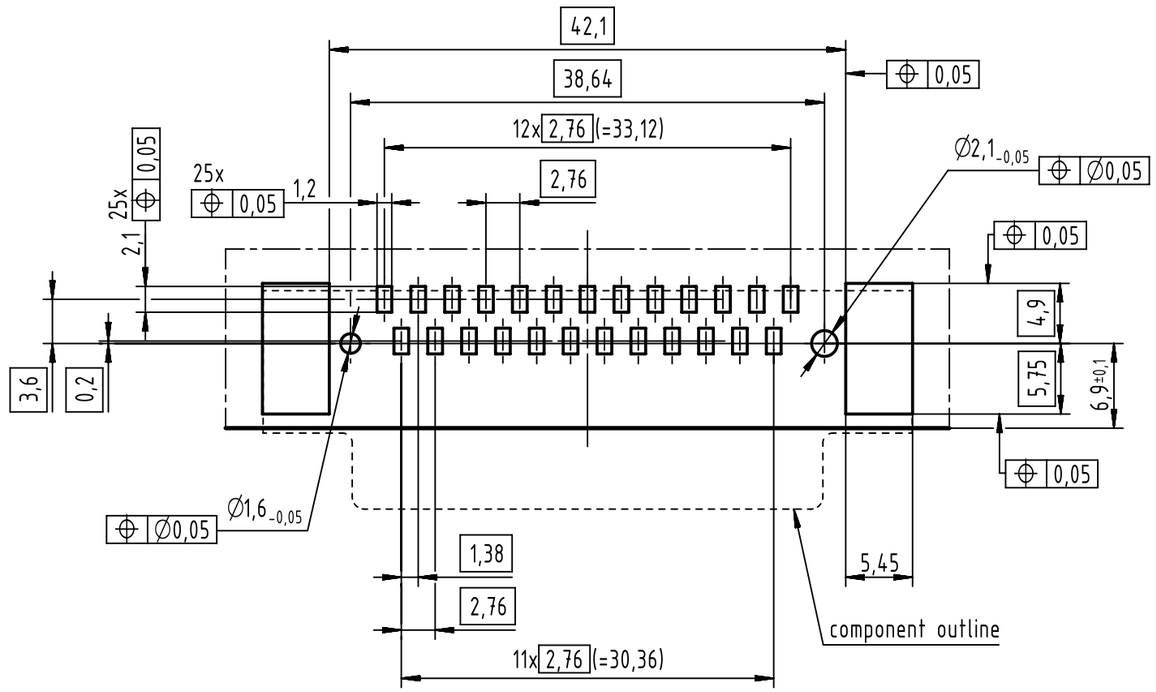

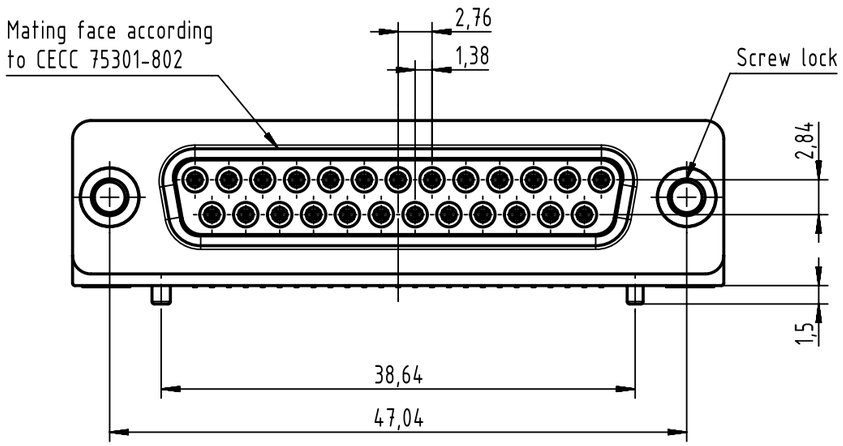

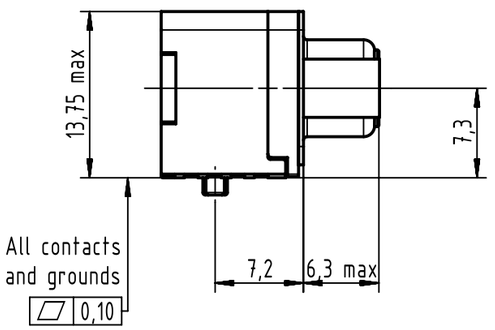

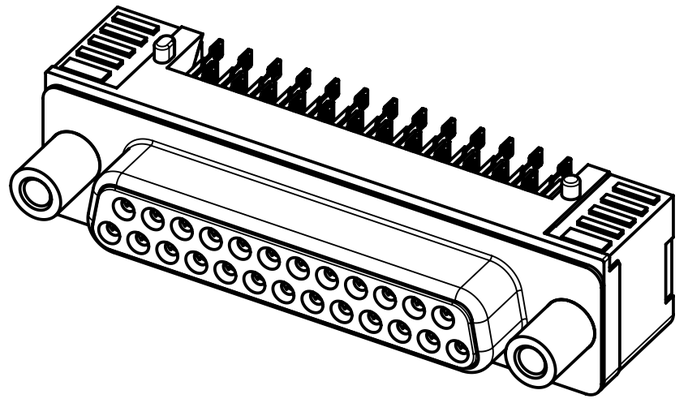

Max. Temperature: 260°C during 10 seconds.
Find further technical information on DS 09550200301.

Part number	PL	Screw lock	Index designation	Samples
0955 356 6622 333	2	4-40 UNC	Black insulator	Reel packaging (140 connectors)
0955 356 3622 741	1			
0955 356 6622 741	2			
0955 356 7622 741	3			
0955 356 3621 741	1	M3		
0955 356 6621 741	2			
0955 356 7621 741	3			

All Dimensions in mm
Original Size DIN A3

Scale 2:1

Free size tol.

Ref.

Sub.

All rights reserved

Department EL PD

Created by ZHUANGJ

Inspected by LUOK

Standardisation HOFFMANN

Date 2018-11-16

State Final Release

HARTING Electronics GmbH
D-32339 Espelkamp

Title D-Sub angled standard SMT 25-pole female ass with screw lock

Doc-Key / ECM-Nr. 100684633/UGD/001/C500000141375

Type TB

Number 0955356X62X

Rev. C

Page 1/1

A3