


# PLL 27.1025.40.1/DALI

PL 27 (1xLED 164W 840/4000K 17640lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

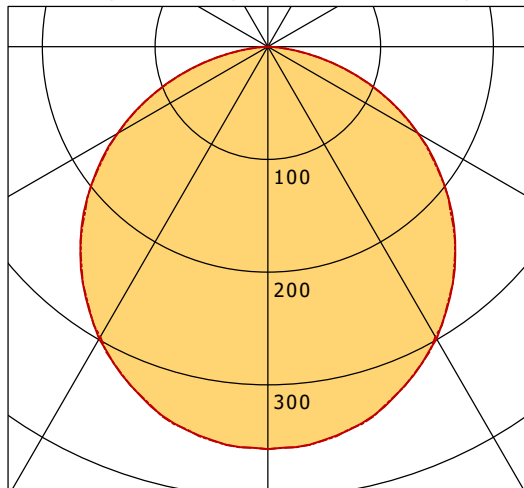

	C0	C90	C180	C270
0°	357	357	357	357
15°	342	343	342	343
30°	299	297	299	297
45°	234	234	234	234
60°	154	154	154	154
75°	65	64	65	64
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	8.81   8.73	699.8
6.0	17.63   17.47	174.9
9.0	26.44   26.20	77.8
12.0	35.26   34.94	43.7
15.0	44.07   43.67	28.0

<b>η</b>	LED
Efficiency	108 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	164 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.2
UGR C90/C270	23.2
CIE Flux Codes	48 79 96 100 100
Ra/CRI	>80