



FLIQ 400.3040.01/DALI

Flix 400 Square (FLIQZ 400.05, 1xLED 26W 840/4000K 3410lm)

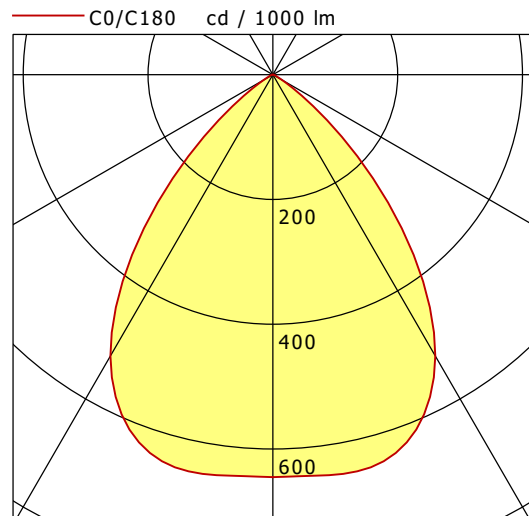

	C0	C90	C180	C270
0°	645	645	645	645
15°	647	647	647	647
30°	521	521	521	521
45°	209	209	209	209
60°	17	17	17	17
75°	4	4	4	4
90°	0	0	0	0
cd / 1000 lm				

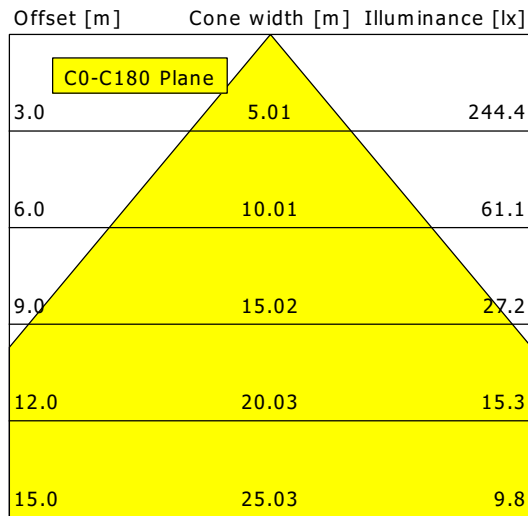

η	LED
Efficiency	131 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	26 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.1
UGR C90/C270	21.1
CIE Flux Codes	81 99 100 100 100
Ra/CRI	>80