
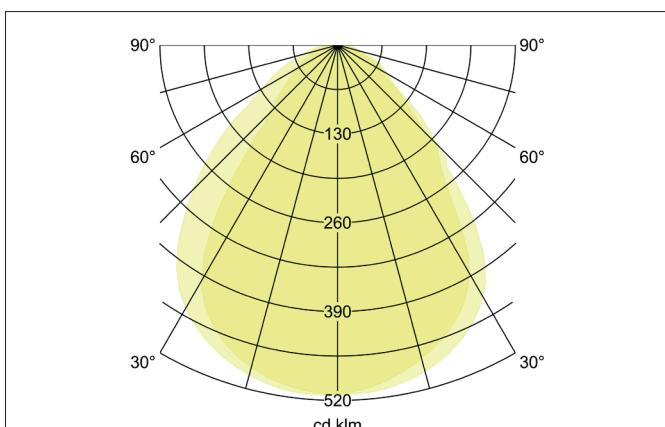


TIMOR LED panel 1495 x 295 mm MP
Article no. 32065074

Light.
For Generations.

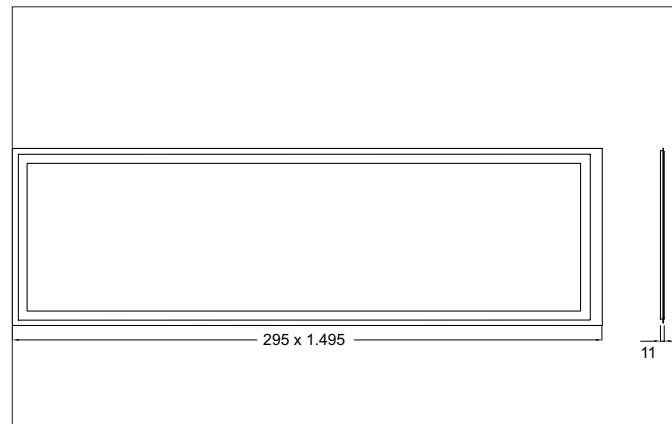

Tender

LED panel 1495 x 295 mm MP, Rectangular. Recessed luminaire for ceilings with visible mounting rails. Ceiling cut-out L x W 1495 x 295 mm, Installation depth 11 mm, Length 1.495 mm, Width 295 mm, Weight 3,500 kg, with rotattionssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, microprismatic cover. Luminous flux 5.600 lm, UGR < 19, Power 1 x 45 W, Light colour neutral white, Correlated color temprature (CCT) 4.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 100.000 h, Rated life time L80/B10 at 25 °C: 50.000 h, Housing material: Aluminium / PMMA, Colour: White, Permissible ambient temperature (ta): -20°C to +45°C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP40, shock resistance according to IEC62262: IK04 .With electronic driver, on/off switchable.

TIMOR LED panel 1495 x 295 mm MP

Article no. 32065074

Light.
For Generations.

Article data	
Article no.	32065074
GTIN	4251433998471
Series name	TIMOR
Short description	LED panel 1495 x 295 mm MP
Material	Aluminium / PMMA
Colour	White
Shape	Rectangular
Built-in width	295 mm
Built-in length	1495 mm
Installation depth	11 mm
Length	1,495 mm
Width	295 mm
Height	11 mm
Scope of delivery	incl. multilumen driver. 800 mA; 900 mA; 950 mA; 1.050 mA
Weight	3.500 kg

Lighting technology	
Colour temperature	4.000 K
Light colour	White
Light output	Direct
Luminous flux	5,600 lm
System efficiency	124 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Reflector	Without
Beam angle	85°
Glare evaluation	UGR < 19
Light sharing	Symmetric
Photobio. Risikogruppe nach EN 62778	RG0
Adjustable color temperature	No

Operating technology of the luminaire	
System output	45 W
Voltage type	AC/DC
AC nominal voltage min	198 V
AC nominal voltage max	264 V
DC nominal voltage min	197 V
DC nominal voltage max	278 V
Current	
Frequenz max.	60 Hz
Frequenz min.	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	II
Degree of protection	IP40
Ambient temperature	-20°C bis +45°C
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Glühdrahtprüfung nach IEC 60695-2-12	650°C
Rated life time L70/B50 at 25 °C	100,000 h
Energieeffizienzklasse	

TIMOR LED panel 1495 x 295 mm MP

Article no. 32065074

Light.
For Generations.

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Impact resistance	IK04
stamp	ENEC D-Kennzeichen
Further references	No cover with thermal insulation material
Material cover	Plastic, microprismatic
Suitable for through-wiring	Yes

Packing data	
Gross weight	3.9 kg
Length of packaging	1,550 mm
Packaging width	340 mm
Packaging height	35 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>

Accessories