


LUZ-D23 105.840.BW/DALI

LUZ | Pendant (1xLED 32W 840/4000K 5130lm)

— C0/C180 cd / 1000 lm - - - C90/C270

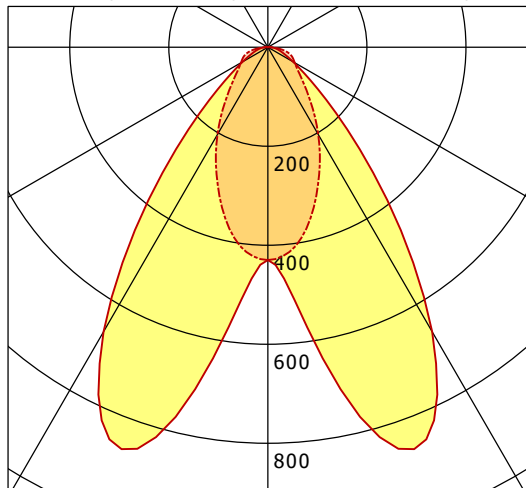

| | C0 | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0° | 430 | 430 | 430 | 430 |
| 15° | 796 | 346 | 796 | 346 |
| 30° | 664 | 204 | 664 | 204 |
| 45° | 210 | 102 | 210 | 102 |
| 60° | 59 | 63 | 59 | 63 |
| 75° | 24 | 42 | 24 | 42 |
| 90° | 6 | 2 | 6 | 2 |
| cd / 1000 lm | | | | |

LDC unsuitable for cone representation.
The C90 angle is oversized.

| | |
|--------------------|-----------------|
| η | LED |
| Efficiency | 160 lm/W |
| Direct/Indirect | ↓ 99% / ↑ 1% |
| System Power | 32 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 20.4 |
| UGR C90/C270 | 22.1 |
| CIE Flux Codes | 72 91 97 99 100 |
| Ra/CRI | > 80 |