


LUZ-T22 106.830.60/DALI-ST


LUZ | Track-Mounted (1xLED 44W 830/3000K 6470lm 60°)

— C0/C180 cd / 1000 lm - - - C90/C270

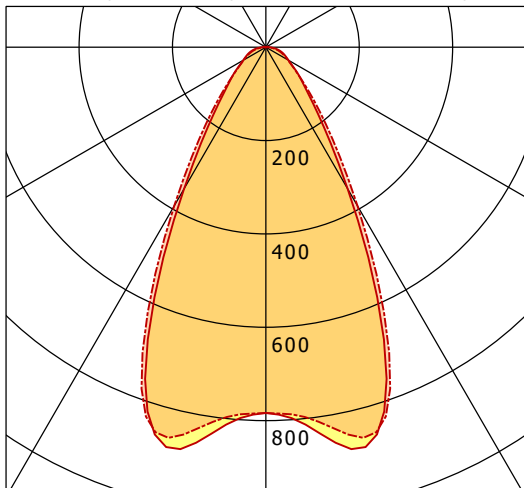

| | C0 | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0° | 784 | 784 | 784 | 784 |
| 15° | 876 | 863 | 876 | 863 |
| 30° | 350 | 393 | 350 | 393 |
| 45° | 116 | 124 | 116 | 124 |
| 60° | 56 | 54 | 56 | 54 |
| 75° | 32 | 28 | 32 | 28 |
| 90° | 7 | 2 | 7 | 2 |
| cd / 1000 lm | | | | |

Offset [m] Cone width [m] Illuminance [lx]

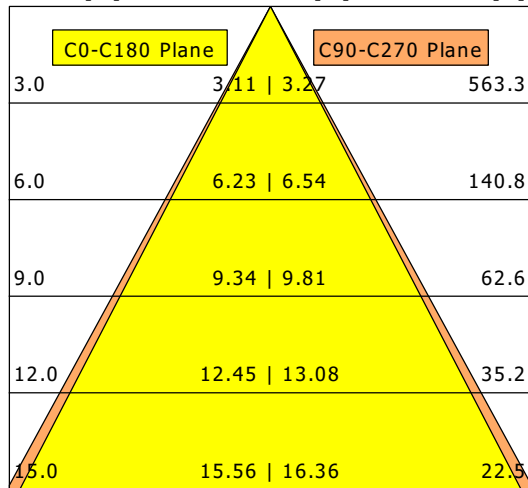

| | |
|--------------------|-----------------|
| η | LED |
| Efficiency | 147 lm/W |
| Direct/Indirect | ↓ 99% / ↑ 1% |
| System Power | 44 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 22.8 |
| UGR C90/C270 | 22.5 |
| CIE Flux Codes | 76 90 97 99 100 |
| Ra/CRI | >80 |