


Art. no. 862235

Power supply unit (CC, DC) dimmable OCTO, DIM, CC,
RSM-12-350T/12 W

DEKOLIGHT

IP

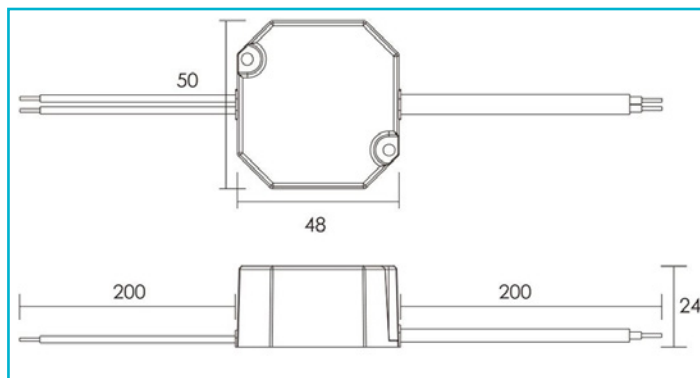

Special features

- Ultra-compact design
- Flicker-free
- Can be dimmed using leading-edge/trailing-edge phase dimmers
- Short-circuit-proof, overload protection, overheating protection

Housing Material	Plastic
Housing Color	Black

Operating Mode	Constant current
Protection Class	Protection class II/protective insulation
Power	6.3-12 W
Output Voltage	18-37 V/DC
Output Current	350 mA
Dimmable	Yes
Control	Trailing-edge dimmer
Number of Channels	1
Power Factor	0.95
Connection Type	Open cables
Primary Connection	With free strand / conductor ends
Secondary Connection	Open cables

Number of Circuit Breaker B10A max.	35
Number of Circuit Breaker B16A max.	56
Number of Circuit Breaker C10A max.	74
Number of Circuit Breaker C16A max.	118
Inrush Current max.	5 A / 100 μ s
Capacitive Load	190 μ F
Reference Point Tc	90 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 65

Life Time	30000 h
-----------	---------

Length	50 mm
Width	48 mm
Height	24 mm
Product weight	80 g

