
lightnet

Matric-F3

Recessed mounted light line, mounting brackets incl - Direct light distribution

Article code: LF3LEL-830H-L1018-A

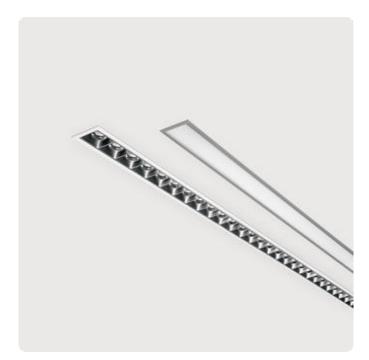

Illustrations may only be similar and serve as an orientation.


Matric-F3. LED. Recessed mounted light line with surrounding frame for installation in sawn wall and ceiling with cut-out openings. Mounting brackets included. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct only light distribution.ÿÿÿÿÿÿÿÿÿÿÿÿÿ Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre. High glare limitation, compatible for office applications. Reflector: Satin Silver. Dimmable DALI.

LxWxH (rectangular). L=1018mm. W=70mm. H=75mm. High-power current. 3357lm. 28W. 2,9kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.



Matric-F3

Recessed mounted light line, mounting brackets incl - Direct light distribution

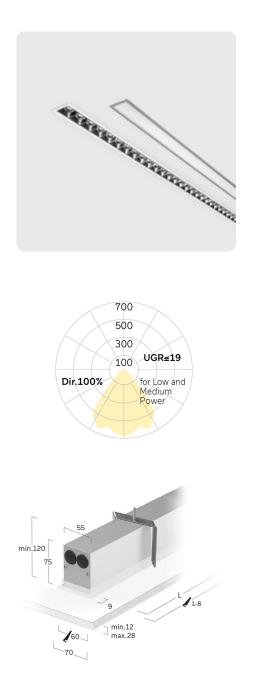

Article code: LF3LEL-830H-L1018-A

Customer	/ Project:			
Note:				

Productname Lamp Installation Type

Surface finish Light characteristics Colour temperature Colour Rendering Index (CRI) Optical system Reflector Colour Inside Control Length L/Diameter D (mm) Width W (mm) Height H (mm) Current/Power Luminous Flux Power consumption Degree of protection Certification LED lifetime Photometric code Photobiological class Indoor/Outdoor Weight (kg)

Matric-F3 LED Recessed mounted light line, mounting brackets incl Silver Anodised Direct light distribution 3000K CRI>80 Lens Louvre Reflector: Satin Silver Dimmable (DALI) L=1018mm W=70mm H=75mm High-Power 3357lm 28W IP20 Prüfzeichen: ENEC L80B10 (tq 25°C) = 50.000h 8 30 / 3 3 9 RG0 (EN62471) Indoor: ta [ambient] max. 25°C 2,9kg

