


Art. no. 346066

Table lamp Office Three Pro, Motion, 80 W, DIM, 2700-6500 K, white

 **DEKOLIGHT**

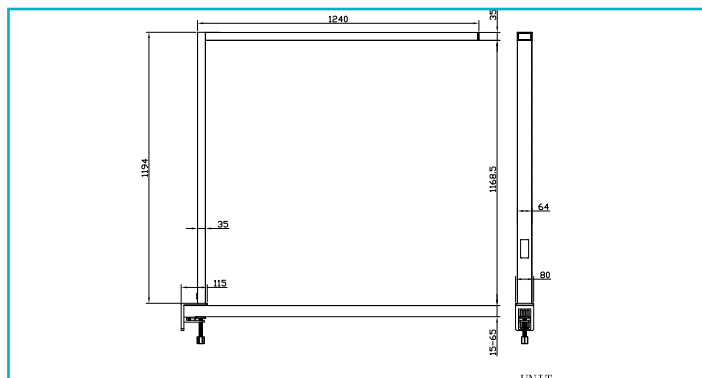

<b>Housing Material</b>	Aluminium	<b>Length</b>	1240 mm
<b>Housing Color</b>	White	<b>Width</b>	64 mm
<b>Material of Lens</b>	Polycarbonate - PC	<b>Height</b>	1194 mm
<b>Protection Class</b>	Protection class I/protective grounding	<b>Base length</b>	500 mm
<b>Rated Input</b>	80 W	<b>Base width</b>	225 mm
<b>Rated Input Voltage Frequency</b>	200-240 V/AC 50 / 60 Hz	<b>Product weight</b>	5500 g
<b>Power Supply Unit incl.</b>	Yes	<b>Working Temperature</b>	-20 to 45 °C
<b>Primary Connection</b>	Safety plug	<b>Storage Temperature</b>	-40 to 80 °C
<b>Primary Cable Length</b>	2.5 m	<b>IP Protection Class</b>	IP 20
<b>Dimmable</b>	Yes	<b>IK Protection Class</b>	IK06
<b>Control technology</b>	Touch-Sensor	<b>Life Time L80 / B10</b>	50000 h
<b>Motion Detector</b>	Yes	<b>Switching Cycles</b>	100000
<b>Kind of Motion Detector</b>	High frequency	<b>Power Consumption</b>	80 kWh/1000h
<b>Detection Distance</b>	0-3.5 m	<b>Energy Efficiency Class Lightsource</b>	This product contains light sources of energy efficiency classes D and F.
<b>Angle of Detection</b>	85 Degree		
<b>Light Source</b>	LED, Light source changeable TC		
<b>Lightcolor</b>	Warm white/neutral white/cold white		
<b>Colour Temperature</b>	2700-6500 K		
<b>Colour Consistency</b>	3 SDCM		
<b>Colour Rendering Index (Ra)</b>	95		
<b>Rated Luminous Flux</b>	9000/9800 lm		
<b>Rated Luminous Flux 2</b>	9800 lm		
<b>Luminous Efficiency</b>	122.5 lm/W		
<b>Rated Angle of Reflection</b>	120 Degree		
<b>Rated Angle of Reflection 2</b>	50 Degree		
<b>UGR</b>	6		
<b>Light Exit Surfaces</b>	2		
<b>Light characteristics</b>	Direct, Indirect		
<b>Light direction</b>	Top, Below		