


AGGY LED-Panel 620 x 620 mm TunableWhite DALI-DT8
Article no. 32249074

Light.
For Generations.

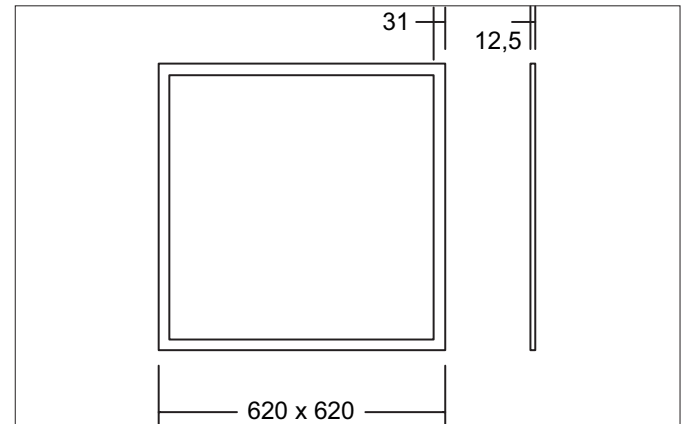

Tender

LED-Panel 620 x 620 mm TunableWhite DALI-DT8, white, Square. In a compact design, for installation in tool-less rapid assembly systems. Set inkl. Konverter für 230V-Netzspannung, DALI-DT8, Maße Konverter: L 126 x B 81 x H 31mm Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Polystyrene, Degree of protection: according to DIN EN 60529 IP40, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 34W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 4.080lm, Colour temperature: from 2.700 K up to 6.000 K, Light colour : White, Beam angle: 115°, Adjustability: Not adjustable, With control gear: Yes, Dimmable: Yes, Control: DALI-DT8.

| Article data | |
|--------------------|---|
| Article no. | 32249074 |
| GTIN | 4251433970774 |
| Series name | AGGY |
| Short description | LED-Panel 620 x 620 mm TunableWhite DALI-DT8 |
| Material | Aluminium / Polystyrene |
| Colour | White |
| Shape | Square |
| Built-in width | 620 mm |
| Built-in length | 620 mm |
| Installation depth | 12.5 mm |
| Length | 620 mm |
| Width | 620 mm |
| Height | 12.5 mm |
| Scope of delivery | inkl. DALI-DT8 TunableWhite dimmbares Betriebsgerät |
| Weight | 2.500 kg |

AGGY LED–Panel 620 x 620 mm TunableWhite DALI-DT8
Article no. 32249074

Light.
For Generations.

| Lighting technology | |
|------------------------------|------------------|
| Colour temperature | 2700 - 6000 K |
| Light colour | White |
| Farbtemperatur 1 | 6,000 K |
| Farbtemperatur 2 | 2,700 K |
| Light output | Direct |
| Lichtstrom 1 | 2,040 lm |
| McAdam-Step | McAdam-Step 3 |
| Colour rendering | CRI > 80 |
| Reflector | Without |
| Beam angle | 115° |
| Glare evaluation | UGR < 22 |
| Light sharing | Symmetric |
| Adjustable color temperature | Infinite control |

| Operating technology of the luminaire | |
|---------------------------------------|----------|
| System output | 34 W |
| Voltage type | AC |
| AC nominal voltage min | 220 V |
| AC nominal voltage max | 240 V |
| Frequenz max. | 60 Hz |
| Frequenz min. | 50 Hz |
| Lamp | LED |
| Protection class | II |
| Degree of protection | IP40 |
| Dimmable | Yes |
| Control | DALI-DT8 |
| Bulb change possible | Yes |
| Rated life time L80/B20 at 25 °C | 50.000 h |

| Mounting technology | |
|-----------------------|---|
| Mounting method | Recessed mounting |
| Place of installation | Ceiling-mounted |
| Adjustability | Not adjustable |
| Further references | No cover with thermal insulation material |
| Material cover | Plastic, opal |

| Packing data | |
|-------------------------|---|
| Gross weight | 3.2 kg |
| Length of packaging | 725 mm |
| Packaging width | 655 mm |
| Packaging height | 40 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |

| Accessories | |
|-------------|--|
| | |