


lightnet

Cubic-F2

Free standing luminaire - Direct/indirect light distribution

Article code: CF2AEM-830M-L600-U-A

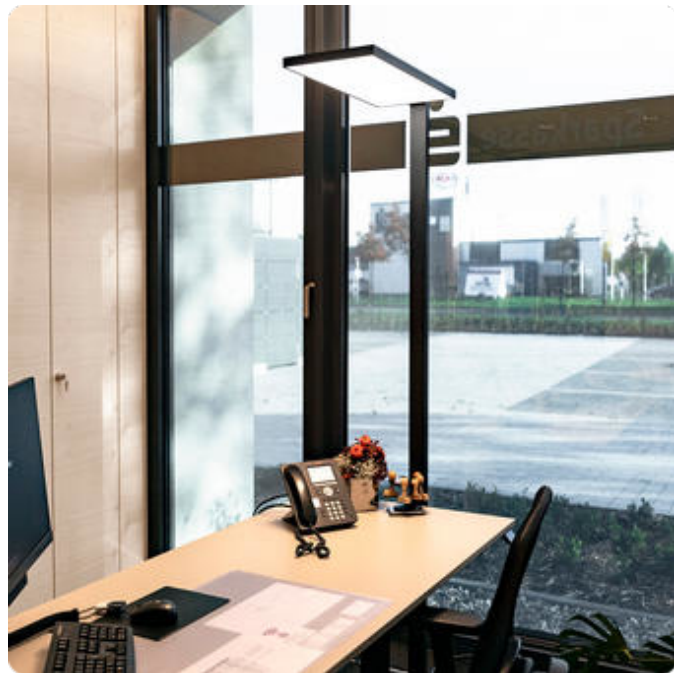

Illustrations may only be similar and serve as an orientation.

Cubic-F2. LED. Free standing luminaire. Luminaire head with 25mm minimalist overall height. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct/indirect light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for reduced luminance in office areas. $UGR \leq 19$. Continuously dimmable multisensor as stand-alone-version. LxWxH (luminaire head, rectangular/Stand). L=600mm. W=300mm. H=


2000/25mm. Medium-power current. 10379lm. 68W. 19,5kg. Binning initial \leq MacAdam 3. U-formed floor base matching luminaire's outer surface colour. Plug Schuko CEE 7/7 (Type E+F). IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

lightnet

Cubic-F2

Free standing luminaire - Direct/indirect light distribution

Article code: CF2AEM-830M-L600-U-A

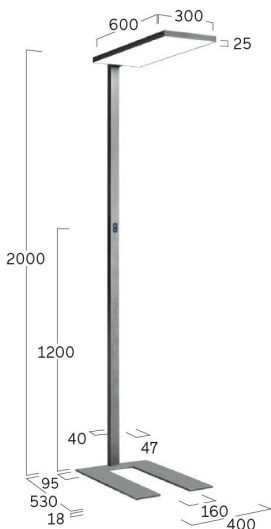

Customer / Project: _____

Note: _____

| | |
|------------------------------|------------------------------------|
| Productname | Cubic-F2 |
| Lamp | LED |
| Installation Type | Free standing luminaire |
| Surface finish | Silver Anodised |
| Light characteristics | Direct/indirect light distribution |
| Colour temperature | 3000K |
| Colour Rendering Index (CRI) | CRI>80 |
| Optical system | Microprismatic screen |
| Control | Dim-Multisensor |
| Length L/Diameter D (mm) | L=600mm |
| Width W (mm) | W=300mm |
| Height H (mm) | H=2000/25mm |
| Current/Power | Medium-Power |
| Luminous Flux | 10379lm |
| Power consumption | 68W |
| Base-Type | U-base |
| Plug | Schuko CEE 7/7 (E+F) |
| Degree of protection | IP20 |
| Certification | Prüfzeichen: ENEC |
| LED lifetime | L85B10 (tq 25°C) = 50.000h |
| UGR | UGR<=19 |
| Photometric code | 8 30 / 3 3 9 |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 19,5kg |

