

## Han 3 EMC Hood Coupler 1 Lever M20

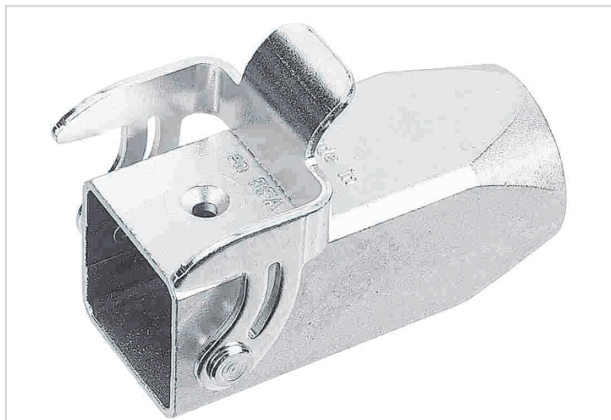


Image is for illustration purposes only. Please refer to product description.

|                    |   |
|--------------------|---|
| Part number        | 19 62 003 1750  |
| Specification      | Han 3 EMC Hood Coupler 1 Lever M20  |
| HARTING eCatalogue | <a href="https://b2b.harting.com/19620031750">https://b2b.harting.com/19620031750</a> |

### Identification

|                          |                        |
|--------------------------|------------------------|
| Category                 | Hoods/Housings         |
| Series of hoods/housings | Han <sup>®</sup> EMC   |
| Type of hood/housing     | Cable to cable housing |

### Version

|                      |  |
|----------------------|--|
| Size                 | 3 A  |
| Version              | Top entry                                  |
| Cable entry          | 1x M20                                     |
| Locking type         | Single locking lever                       |
| Field of application | Hoods/Housings for higher EMC requirements |

### Technical characteristics

|  |  |
|--|--|
| Limiting temperature                   | -40 ... +125 °C                                    |
| Degree of protection acc. to IEC 60529 | IP44<br>IP65 / IP67 with seal screw 09 20 000 9918 |
| Type rating acc. to UL 50 / UL 50E     | 12   |

### Material properties

|                         |               |
|-------------------------|---------------|
| Material (hood/housing) | Zinc die-cast |
| Surface (hood/housing)  | Uncoated      |
| Colour (hood/housing)   | Unpainted     |
| Material (locking)      | Steel         |
| Surface (locking)       | Zinc plated   |



Pushing Performance  
Since 1945

## Material properties

|                                      |   |
|--------------------------------------|---|
| RoHS                                 | compliant with exemption  |
| RoHS exemptions                      | 6(a) / 6(a)-I: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0,35 % lead by weight / Lead as an alloying element in steel for machining purposes containing up to 0,35 % lead by weight and in batch hot dip galvanised steel components containing up to 0,2 % lead by weight |
| ELV status                           | compliant with exemption  |
| China RoHS                           | 50  |
| REACH Annex XVII substances          | Not contained   |
| REACH ANNEX XIV substances           | Not contained   |
| REACH SVHC substances                | Yes   |
| REACH SVHC substances                | Lead  |
| California Proposition 65 substances | Yes   |
| California Proposition 65 substances | Lead<br>Nickel  |

## Specifications and approvals

|           |        |
|-----------|--------|
| Approvals | DNV GL |
| CE        | Yes    |

## Commercial data

|                                |  |
|--------------------------------|--|
| Packaging size                 | 10                                       |
| Net weight                     | 70.7 g                                   |
| Country of origin              | Romania                                  |
| European customs tariff number | 85389099                                 |
| GTIN                           | 5713140132382                            |
| eCl@ss                         | 27440202 Shell for industrial connectors |